


Startec Mortice toilet cubicle lock




- > Deadbolt operated by turn/emergency release
- > Case: Steel
- > Forend: Square or radius, 2 piece, stainless steel
- > Strike plate: Square, flat. Included. Stainless steel
- > Deadbolt: Stainless steel
- > Follower: 8 mm stainless steel
- > Holed for bolt through furniture at 38 mm centres
- > Order qty: 1 pc

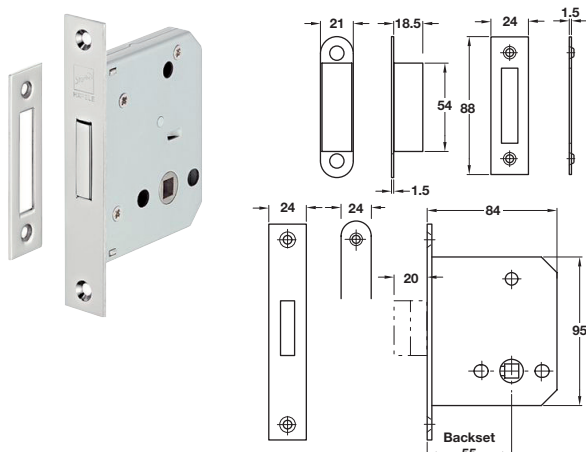

Backset 55 mm, case size 84 mm

Finish	Square forend	Radius forend
Satin stainless steel	911.22.511	911.22.926
Graphite black	-	911.22.927

Startec Mortice cylinder deadlock

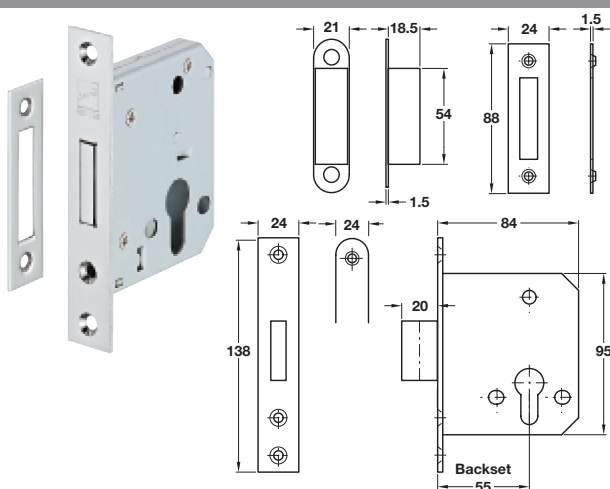

- > Deadbolt operated by cylinder
- > Case: Steel, 15 mm wide. Forend: Square or radius. Stainless steel
- > Strike plate: Square, flat. Included. Stainless steel
- > Deadbolt: Stainless steel. 20 mm throw
- > Holed for bolt through furniture at 38 mm centres
- > Approved CF 5395 Certifire
- > Suitable for use in FD30/60 & 90 minute timber fire doors when fitted with a fire protection intumescent kit. These cylinder locks have been tested on a min. 44 mm thick timber door for 30 mins fire resistance or min. 54 mm thick doors for 60 mins fire resistance
- > Tested in accordance with BS EN 12209
- > Order qty: 1 pc

BS EN 12209

3 X 8 1 0 G 3 B C 0 0



Backset 55 mm, case size 84 mm


Finish	Square forend	Radius forend
Satin stainless steel	911.22.490	911.22.901
Graphite black	-	911.22.929



Fire protection intumescent kit must be ordered separately, for use in a fire door, as shown on page 5.9A

Cylinder not included, please order separately

Startec Mortice latch

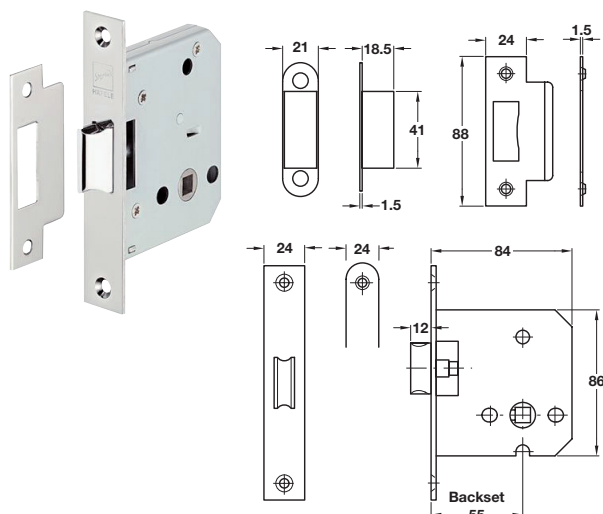

- > Latchbolt operated by lever handles, reversible
- > Case: Galvanized steel. Forend: Square. Stainless steel
- > Flanged strike plate: Square or radius, flat. Included. Stainless steel
- > Latchbolt follower: 8 mm for use with sprung or unsprung furniture
- > Holed for bolt through furniture at 38 mm centres
- > Approved CF 5395 Certifire
- > Suitable for use in FD30/60 & 90 minute timber fire doors when fitted with a fire protection intumescent kit. These cylinder locks have been tested on a min. 44 mm thick timber door for 30 mins fire resistance or min. 54 mm thick doors for 60 mins fire resistance
- > Tested in accordance with BS EN 12209
- > Order qty: 1 pc

BS EN 12209

3 X 8 1 0 G 3 B C 0 0



Backset 55 mm, case size 84 mm

Finish	Square forend	Radius forend
Satin stainless steel	911.23.370	911.23.394
Graphite black	-	911.22.931



Fire protection intumescent kit must be ordered separately, for use in a fire door, as shown on page 5.9A