


HANDRAIL BRACKETS

Handrail brackets for flat or round railing systems in stainless steel, brass, zinc alloy, steel or aluminium.

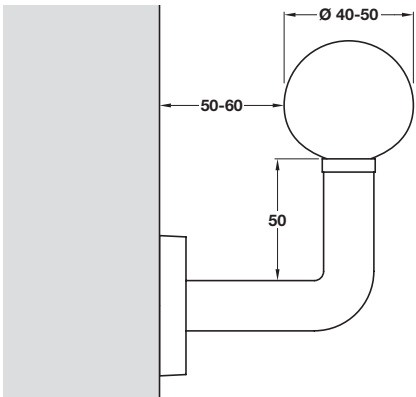


The Equality Act 2010
Part three: Making your premises accessible to disabled people
Handrails
> It is stated that a handrail should be:
Oval or circular profile and have a diameter of at least 40 mm but no greater than 50 mm
Finished so as to provide a visual contrast with the surroundings
Easy and comfortable to grip with no sharp edges, smooth and NOT cold to touch.
There should be a clearance of 50 to 60 mm between the handrail and the adjacent wall surface
> Handrail brackets should incorporate on either side of a fixed or semi-permanent ramp
> Handrails should extend for 300 mm beyond the bottom and top of the ramp

Stainless steel handrail bracket




- > Suitable for flat based handrails
- > Concealed fixing
- > Grade 316 stainless steel
- > Order qty: 1 pc

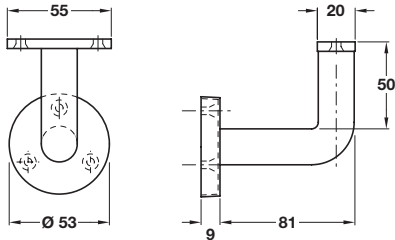


Finish	Cat. No.
Satin stainless steel	986.08.000
Polished stainless steel	986.08.001

Stainless steel handrail bracket

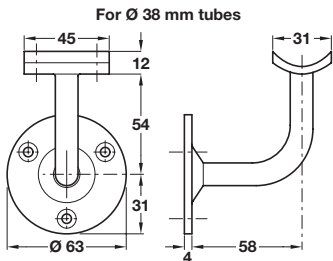

- > Curved for Ø 38 mm and Ø 51 mm tubes
- > Stainless steel
- > Order fixing screws separately
- > Order qty: 1 pc

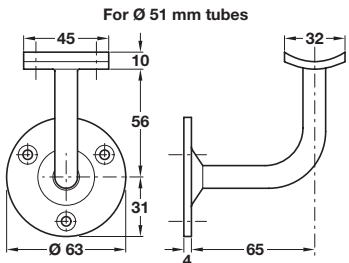

Ø 38 mm and Ø 51 mm tubes shown on page 106

Finish	Ø 38 mm rail	Ø 51 mm rail
Satin stainless steel	812.51.041	812.61.041
Polished stainless steel	812.51.141	812.61.141

Most of the products you will find in this catalogue are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.