



COMPAIRFLOW® STAR WALL VENT SYSTEM

The Compair® flow Star wall vent system prevents warm room air escaping outside which, compared with a traditional wall vent system, amounts to daily savings of both energy and cost. This is achieved because the vent cover only remains open when there is air pressure. When there is no air pressure the cover remains in place.

- > Lowest pressure loss of all common wall conducts
- > Maximum flow rate of the vapour hood
- > Low noise generation by the vapour hood
- > Optimum heat insulation
- > No back pressure shutter required
- > No rattling in case of gusts of wind
- > Good seal with the vapour hood switched off
- > Complies with the requirements of the blower door test



Air pressure opens vent



Cover doesn't protrude when system not in use




Star round wall vent system



- > Set includes:
 - 1x Round external stainless steel cover: Ø 220 mm (150 system)
 - 1x Duct tube, adjustable length; see table below
 - 1x Plate
- > Connector depth:
 - Round ducting tube: 24 mm
 - Rectangular ducting: 80 mm
- > **System** **Plate (H x W)** **Min. pressure**

System 150	190 x 180 mm	150 Pa
------------	--------------	--------
- > Order qty: 1 set

Connector depth

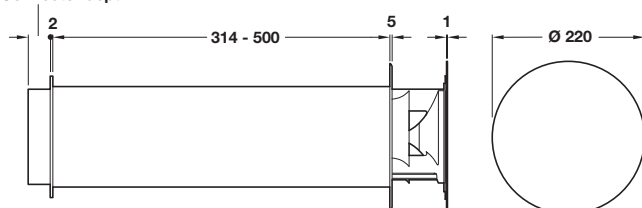

System 150: For installation in approx. Ø 155 mm hole

Round wall vent system			
System	Tube Ø	Installed depth	Cat. No.
150	Ø 150 mm	314 - 500 mm	500.97.562
Rectangular wall vent system			
System	Tube (H x W)	Installed depth	Cat. No.
150	94 x 227 mm	314 - 500 mm	500.97.561