

ROPOX VERTIINSIDE SHELVING FOR ASSISTED LIVING

A complete shelving unit for installation in wall cabinets, controls at worktop level electrically power the shelving unit to a reachable height.

1

Kitchen Fittings and Accessories: Accessible Kitchens




- > Electrical height adjustable shelves enable the user to easily reach items in the cabinets
- > Ideal for children, wheelchair users or simply to make it easier for anyone to reach top shelves
- > The system is especially ideal for wheelchair users as you can reach the two lower shelves without having to open the cabinet doors first
- > The VertiInside upper cabinet system looks just like any other common kitchen cabinet system, the shelves can be adjusted by a control panel which can be integrated in the fascia
- > Replaces the back and base panels of a standard wall unit
- > We recommend double doors for cabinet widths from 600 mm to prevent the users from stepping back when opening the doors



- ➔ When used over a Flexi worktop frame (as pictured above) use Smartbox 506.17.996 to interlink the safety systems, shown on page 1.601

VertiInside adjustable shelves

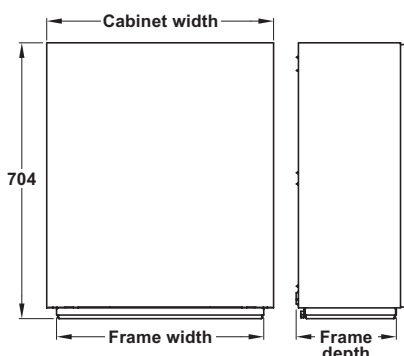

- > Min. wall unit height: 704 mm
- > Max. load: 80 kg evenly distributed
- > Frame height: 704 mm
- > Cabinet width: 600/900/1000 mm
- > Frame depth: 265/310 mm
- > Also includes 2x integrated safety stops one for the top and one for the bottom
- > Order qty: 1 pc

For cabinet width	Frame width x depth	Cat. No.
White RAL 9010		
600 mm	508 x 265 mm	506.17.770
1000 mm	908 x 265 mm	506.17.772 
Anthracite RAL 7016		
600 mm	508 x 310 mm	506.17.780
900 mm	808 x 310 mm	506.17.781
1000 mm	908 x 310 mm	506.17.782



Most of the products you will find in this Directory are available within 24 hours. However, to be able to offer the breadth of range in our collection, a small number of products have a longer lead time that is typically around 14 days. Please call 0800 171 2909 for an accurate delivery date when you see this symbol.

PAGE AMENDED
05.03.25/1

SALES DEPARTMENT 0800 171 2909

TECHNICAL SUPPORT 0800 171 2908

Page
Section 1 599