

SWING OUT CORNER UNIT - VAUTH-SAGEL CORNERSTONE

Easy to pull out shelving unit as only the support tube needs to be mounted. Soft close available as an optional extra.



10 YEAR WARRANTY - Delivering German engineering excellence

Covering their full range, the warranty gives you and your customers complete peace of mind when purchasing Vauth-Sagel products.

You can find further information on our website www.hafele.co.uk/vauth-sagel

- > Easy assembly - only the support tube needs to be mounted
- > Swing movement of the shelves allows free access to adjoining cabinets
- > Simple height adjustment, even when installed
- > Optional door attachment, modular design
- > Unhanded
- > Large area shelves
- > Each shelf has an 18 kg load capacity
- > Soft close damping available as an optional extra



Cornerstone Swing pull out unit with shelves, white base with chrome edge, unhanded

Cornerstone Swing pull out shelving unit



White base with chrome edge, unhandled



Premea lava grey solid base wire baskets




White solid base and chrome edge baskets

- > Suitable for 800, 900 or 1000 corner base cabinets
- > Min. built-in depth: min. 490 mm
- > Min. installation height: 651-690 mm
- > Total weight capacity max. 36 kg
- > Weight capacity per basket max. 18 kg
- > Single fixing point on cabinet centre post
- > Shelves pull out independently
- > Set includes:
 - 2x Shelves, laminated wooden shelves with a lava grey or white base and lava grey wire or chrome edge
 - 1x Pull-out and pivoting mechanism
 - Fitting instructions
- > Order qty: 1 set



For cabinet width	For door width	Unhandled
Premea lava grey solid base and wire shelves		
800 mm	400 mm	542.05.870
900 mm	450 mm	542.05.871
1000 mm	500 mm	542.05.872
1000 mm	600 mm	542.05.873
White solid base and chrome edge shelves		
800 mm	400 mm	542.05.290
900 mm	450 mm	542.05.291
1000 mm	500 mm	542.05.292
1000 mm	600 mm	542.05.293

Soft close mechanism for Cornerstone Swing




- > Soft close damper for use with Cornerstone Swing pull out unit
- > Order qty: 1 pc




	Cat. No.
Soft close mechanism	542.05.999

Installation

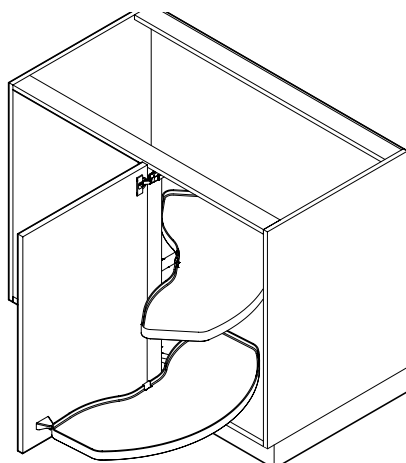

Cabinet dimensions

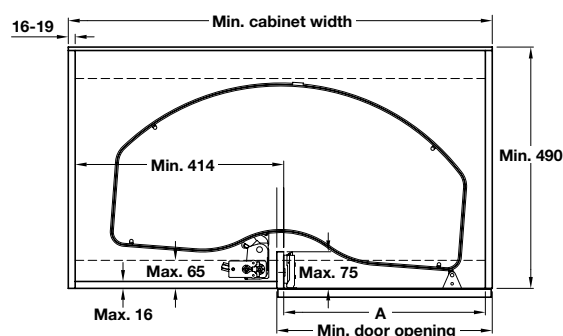

Min. cabinet width	Min. door width	Dim. A
800 mm	400 mm	362 - 368 mm
900 mm	450 mm	412 - 418 mm
1000 mm	500 mm	462 - 468 mm
1000 mm	600 mm	562 - 568 mm