


LOOX5 12V LED 2101 PLINTH LIGHT MONOCHROME

Recess mounted plinth lights. Application as orientation lighting.



- > Endless wiring
- > Simple installation in 12 mm drill hole
- > Includes cover sleeves in 3 colours (white, grey, black)

Loox5 12V LED 2101 plinth light monochrome

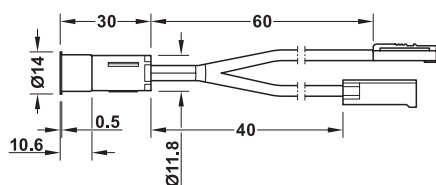

- > For mounting in drilled hole
- > Drill hole Ø: 12 mm hole
- > Voltage: 12V. Wattage: 0.3W
- > Degree of protection: IP20
- > With 60 mm supply cable with Loox5 12V connector and 40 mm forwarding cable
- > Plastic
- > Set consists of:
 - 5x lights, black housing with opal white diffuser
 - 3x cover sleeves per light (1x each of white, grey, black)
- > Order qty: 1 set

5

Lighting: Loox5 LED

3000 K	4000 K		110°
48 lx	54 lx		250 mm
12 lx	14 lx		500 mm
5 lx	6 lx		750 mm
3 lx	3 lx		1000 mm

Illuminance in lx in relation to a single light



The values for power, luminous flux and luminous efficiency apply to a single light



Control using Häfele Connect Mesh system, shown from page 5.178

Output:	3000 K	4000 K
Light colour:	Warm white	Cool white
Wattage (W):	0.3	0.3
Number of diodes	1	1
Light output (Lm):	9	10
Efficacy (Lm/W):	30	33
CRI Ra / R9:	90 / 60	90 / 60

5 12V



	3000 K	4000 K
5 piece set	833.72.603	833.72.604

YOU ALSO NEED:



DRIVER
Page 5.156



SWITCH
Page 5.159A-166

OPTIONAL ACCESSORIES

Pages 5.158-159, 5.167-168, 5.178-181

PAGE CREATED
21.03.24

SALES DEPARTMENT 0800 171 2909

TECHNICAL SUPPORT 0800 171 2908