


LOOX5 24V LED 3148 FLEXIBLE STRIP LIGHT MONOCHROME, 8 MM



Aluminium profiles are available to order separately, shown from page **5.184**



Loox5 24V LED 3148 flexible strip light, 9.5W/m, 8 mm width

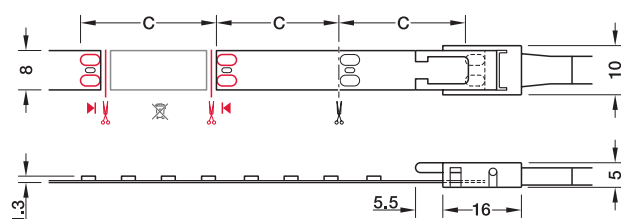

C = section length = 50 mm

2700 K	3000 K	4000 K	5000 K	6500 K		120°
3085 lx	3140 lx	3225 lx	3385 lx	3400 lx		250 mm
1240 lx	1245 lx	1275 lx	1285 lx	1300 lx		500 mm
675 lx	685 lx	685 lx	690 lx	700 lx		750 mm
415 lx	425 lx	430 lx	440 lx	450 lx		1000 mm

Illuminance value in lx applies to 1 m strip length, without diffuser

- > High luminous efficacy
- > Equipped with high-quality CREE LEDs
- > For surface mounting, self adhesive, 5 or 50 m length
- > Can be shortened every 50 mm
- > Voltage: 24V. Wattage: 9.5W per metre
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: L80/B10 >50,000 h, st. L70/B50 >80,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 or 50 m length)



- > Maximum recommended strip light length for optimum visual light output: 6.0 m
- > Maximum strip length (visual) describes a strip section with a visually imperceptible drop in luminous flux of max. 30%
- > Please note: A strip section with a new power supply that follows immediately is noticeably brighter
- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.157**
- > Lead must be ordered separately, shown on page **5.171**

Output:	2700 K	3000 K	4000 K	5000 K
Light colour:	Warm white		Cool white	
Wattage (W):	9.5W per metre			
Energy efficiency:				
Number of diodes:	160 per metre			
Light output (Lm/m):	1445	1475	1540	1550
Efficacy (Lm/W):	152	155	162	163
CRI Ra / R9:	92 / >50			

5 24V




Length	2700 K	3000 K	4000 K	5000 K
5 m	833.76.255	833.76.256	833.76.257	833.76.258
50 m	-	833.76.476	833.76.477	833.76.478

ARTICLES REMOVED FROM PAGE

833.76.352 DISCONTINUED - REPLACED BY **833.76.255**
833.76.353 DISCONTINUED - REPLACED BY **833.76.256**
833.76.354 DISCONTINUED - REPLACED BY **833.76.257**
833.76.355 DISCONTINUED - REPLACED BY **833.76.258**

YOU ALSO NEED:



DRIVER

Page 5.157



LEAD

Page 5.171



SWITCH

Page 5.160-166

OPTIONAL ACCESSORIES

Pages 5.158-159, 5.167-168, 5.178-181

PAGE AMENDED
21.03.25/2