


LOOX5 24V LED 3150 FLEXIBLE STRIP LIGHT MONOCHROME, 8 MM



Aluminium profiles are available to order separately, shown from page **5.184**



Loox5 24V LED 3150 flexible strip light (constant current), 6.5W/m, 8 mm width

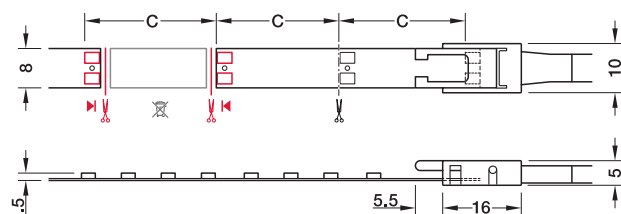

C = section length = 50 mm

2700 K	3000 K	4000 K	5000 K		120°
2050 lx	2150 lx	2205 lx	2340 lx		250 mm
890 lx	930 lx	990 lx	1010 lx		500 mm
490 lx	520 lx	545 lx	550 lx		750 mm
305 lx	325 lx	335 lx	340 lx		1000 mm

Illuminance value in lx applies to 1 m strip length, without diffuser



- > Maximum recommended strip light length for optimum visual light output: 13.5 m
- > With constant current strip lights, the maximum strip length (visual) describes a strip section within which the drop in luminous flux is not visually perceptible, not even in comparison to a strip section with a new power supply that follows immediately
- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.157**
- > Lead must be ordered separately, shown on page **5.171**

ARTICLES REMOVED FROM PAGE

833.76.362 DISCONTINUED - REPLACED BY **833.76.265**
833.76.363 DISCONTINUED - REPLACED BY **833.76.266**
833.76.364 DISCONTINUED - REPLACED BY **833.76.267**
833.76.365 DISCONTINUED - REPLACED BY **833.76.268**


- > High luminous efficacy
- > Häfele constant current technology
- > Uniform brightness over the entire band length
- > Longer service life, visual band length, luminous efficiency
- > Protected from short-term voltage peaks up to 26.4 V
- > Equipped with high-quality CREE LEDs
- > For surface mounting, self adhesive, 5 m length
- > Can be shortened every 50 mm
- > Voltage: 24V. Wattage: 6.5W per metre
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: L80/B10 >70,000 h, st. L70/B50 >100,000 h
- > Width: 8 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m length)

Output:	2700 K	3000 K	4000 K	5000 K
Light colour:	Warm white		Cool white	
Wattage (W):	6.5W per metre			
Energy efficiency:				
Number of diodes:	160 per metre			
Light output (Lm/m):	945	1030	1060	1080
Efficacy (Lm/W):	145	158	163	166
CRI Ra / R9:	92 / >50			



Length	2700 K	3000 K	4000 K	5000 K
5 m	833.76.265	833.76.266	833.76.267	833.76.268

YOU ALSO NEED:



PAGE AMENDED
21.03.25/2

SALES DEPARTMENT 0800 171 2909

TECHNICAL SUPPORT 0800 171 2908