


LOOX5 12V LED 2160 FLEXIBLE STRIP LIGHT MONOCHROME, 5 MM



Aluminium profiles are available to order separately, shown from page **5.184**



Loox5 12V LED 2160 flexible strip light, 3.0W/m, 5 mm width

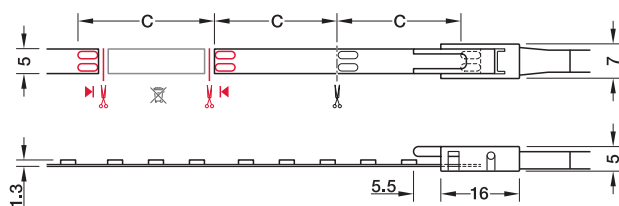

C = section length = 50 mm

2700 K	3000 K	4000 K	5000 K	120°	
940 lx	970 lx	1000 lx	1030 lx		250 mm
400 lx	420 lx	430 lx	430 lx		500 mm
220 lx	235 lx	240 lx	240 lx		750 mm
135 lx	145 lx	145 lx	145 lx		1000 mm

Illuminance value in lx applies to 1 m strip length, without diffuser

ARTICLES REMOVED FROM PAGE

833.74.320 DISCONTINUED - REPLACED BY **833.74.025**
 833.74.321 DISCONTINUED - REPLACED BY **833.74.026**
 833.74.322 DISCONTINUED - REPLACED BY **833.74.027**
 833.74.323 DISCONTINUED - REPLACED BY **833.74.028**
 833.74.324 DISCONTINUED
 833.74.325 DISCONTINUED
 833.74.326 DISCONTINUED
 833.74.327 DISCONTINUED

- > High luminous efficacy
- > Equipped with high-quality CREE LEDs
- > For surface mounting, self adhesive, 5 m length
- > Can be shortened every 50 mm
- > Voltage: 12V. Wattage: 3.0W per metre
- > Dimmable
- > Degree of protection: IP20
- > Lifetime: L80/B10 >50,000 h, st. L70/B50 >80,000 h
- > Width: 5 mm
- > Height: 1.3 mm
- > Lead not included, must be ordered separately
- > White plastic
- > Order qty: 1 pc (roll of 5 m length)

**EXTRA
NARROW
5 mm**



- > Maximum recommended strip light length for optimum visual light output: 3.5 m
- > Maximum strip length (visual) describes a strip section with a visually imperceptible drop in luminous flux of max. 30%
- > Please note: A strip section with a new power supply that follows immediately is noticeably brighter
- > Maximum strip length is dependant on driver wattage capacity, shown on page **5.156**
- > Lead must be ordered separately, shown on page **5.170**

Output:	2700 K	3000 K	4000 K	5000 K
Light colour:	Warm white		Cool white	
Wattage (W):	3.0W per metre			
Energy efficiency:				
Number of diodes:	160 per metre			
Light output (Lm/m):	440	460	480	495
Efficacy (Lm/W):	147	153	160	165
CRI Ra / R9:	92 / >50			

5 12V					
Length	2700 K	3000 K	4000 K	5000 K	
5 m	833.74.025	833.74.026	833.74.027	833.74.028	

YOU ALSO NEED:

DRIVER
Page 5.156

LEAD
Page 5.170

SWITCH
Page 5.160-166

OPTIONAL ACCESSORIES
Pages 5.158-159, 5.167-168, 5.178-181

PAGE AMENDED
20.03.25/2

SALES DEPARTMENT 0800 171 2909

TECHNICAL SUPPORT 0800 171 2908