



MIRROR AND MAGNETIC TAPES

Mirror tape

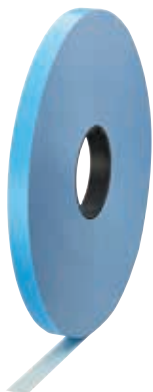

- > Double-sided foam adhesive tape for permanent mounting on smooth surfaces
- > Not suitable for adhesion on rough surfaces, foam or rubber
- > For mounting mirrors, PVC window transoms, and for mounting elements on tiles
- > Equal adhesion on both sides
- > Dampens and compensates for vibration
- > Resistant to ageing, UV and softeners
- > Final hardness after 24 hours
- > Recommended application temperature 18°C to 35°C
- > Temperature range: -40°C to +95°C; with lower temperatures the initial adhesion of the tape is reduced
- > Always apply adhesive strips vertically, not horizontally to mirror
- > 19 or 25 mm widths
- > 50 m rolls
- > Order qty: 1 pc

Tape width	Thickness	Cat. No.
19 mm	1.0 mm	003.58.210
25 mm	1.0 mm	003.58.211
19 mm	1.5 mm	003.58.212
25 mm	1.5 mm	003.58.213

Flexible magnetic tape



- > Ideal for exhibition displays, removable signs, magnetic seals, removable access panels and more applications
- > Adhesive backed
- > Can be cut to size with normal scissors, craft knife etc.
- > Flexible allowing it to follow gentle contours and curves
- > Attractive force is 68g/cm² (max. grams pull force per square cm)
- > Max operating temperature is 50°C
- > 30 m rolls
- > Order qty: 1 pc



- > For best results and to avoid repulsion problems, peel away the first tape adhesive protector and press in required location to adhere

Put the second tape on top so it is aligned magnetically. Peel away the adhesive protector on the second tape and press the item you want to be held by the tapes, onto the second tape to adhere

- > This guarantees perfect magnetic alignment. If not done this way, there is a chance that the poles on each tape may be aligned in a repulsive state

Tape width	Thickness	Cat. No.
12.7 mm	1.5 mm	007.81.208