


Definition of terms: Drawer and pull out for door front fixing



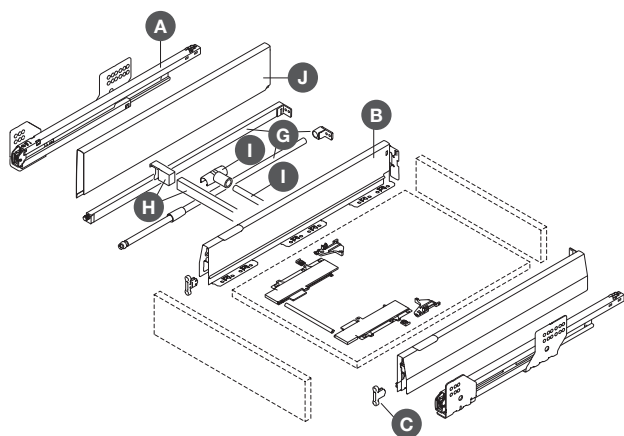


- A** Drawer runner, Push-to-Open Soft-Close optional
- B** Drawer sides with cover caps
- C** Front fixing brackets
- G** Side rail set, round/straight-edged
- H** Cross rail and cross rail holder, rectangular
- I** Cross rail and cross rail holder, round
- J** Height extension side panel
- K** Panel holder and lateral glass panel (not shown)
- L** Front panel stabilising plate


Drawer side design: Drawer and pull out for door front fixing

Drawer side height 60 mm

Drawer side height 92 mm

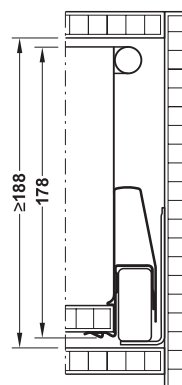


With round or rectangular railing

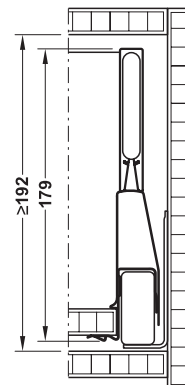

With panel holder

Cutting dimensions for self-manufactured elements

Pull out for door front fixing

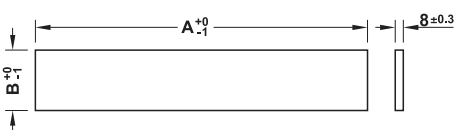

Length A = nominal length of cabinet runner - 45 mm

Height B = 82 mm

Matrix Box P system fixing screws

- > Fixing screws for Matrix Box P must be ordered separately
- > Galvanized steel
- > Order qty: Multiples of 100 pcs

Screw type required for:	Cat. No.	Screw type required for:	Cat. No.
 Cabinet rail, front fixing brackets for railing Varianta, csk head, Ø 5 x 13.5 mm	340.29.724	 Internal front panel holder Hospa, csk head, Ø 3.5 x 15 mm	015.31.639
 Front fixing Varianta, cyl. head, Ø 5 x 16 mm	013.20.949	 Bottom/rear panel Hospa, csk head, Ø 3.5 x 30 mm	015.31.684
 Rear panel brackets, railing, rear panel holder Hospa, csk head, Ø 3.5 x 13 mm	015.31.620	 Bottom brackets Hospa, pan head, Ø 3.5 x 13 mm	015.71.624