



Accuride 3932 front disconnect runners, full extension



- > Side mounting only
- > Drawer width must not exceed slide length
- > Load carrying capacity up to 68 kg
- > Front disconnect (by depressing lever) for drawer removal
- > Hold-in feature holds the closed drawer in
- > DZ - 12 hours salt spray test
- > 12.7 mm slide thickness
- > Please note maximum drawer width to be used. Drawer width should not exceed installed length
- > Not suitable for flat mounting
- > Operating temperature range 10 to 40°C
- > Bright zinc-plated steel
- > Order fixing screws separately (max. head height 2.5 mm, Ø 9.6 mm)
- > Order qty: 1 pair

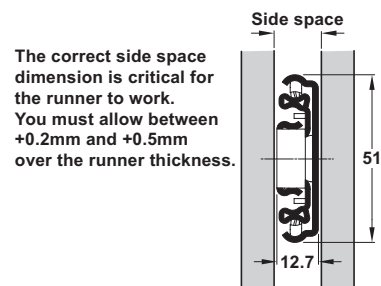

Not suitable for use with mounting brackets



Installed length	Extension length	Load capacity	Cat. No.
250 mm	250 mm	68 kg	432.23.400
300 mm	300 mm	68 kg	432.23.401
350 mm	350 mm	68 kg	432.23.402
400 mm	400 mm	68 kg	432.23.403
450 mm	450 mm	68 kg	432.23.404
500 mm	500 mm	68 kg	432.23.405
550 mm	550 mm	68 kg	432.23.406
600 mm	600 mm	68 kg	432.23.407
650 mm	650 mm	68 kg	432.23.408
700 mm	700 mm	68 kg	432.23.409