



Accuride 3932-EC easy close front disconnect runners, full extension

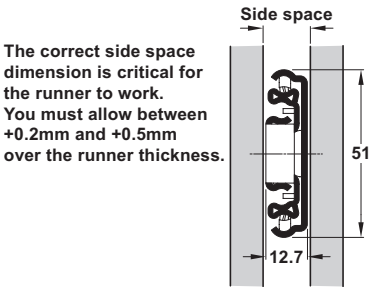

- > Side mounting only
- > Drawer width must not exceed slide length
- > Load carrying capacity up to 68 kg
- > Soft close on last 45 mm of closing cycle
- > Front disconnect (by depressing lever) for drawer removal
- > Hold-in feature holds the closed drawer in
- > DZ - 12 hours salt spray test
- > 12.7 mm slide thickness
- > Please note maximum drawer width to be used. Drawer width should not exceed installed length
- > Not suitable for flat mounting
- > Operating temperature range 10 to 40°C
- > Bright zinc-plated steel
- > Order fixing screws separately (max. head height 2.5 mm, Ø 9.6 mm)
- > Order qty: 1 pair

 Not suitable for use with mounting brackets

Full Extension

TESTED 50,000 CYCLES

FIXINGS REQUIRED VARIANTA Ø 5

FIXINGS REQUIRED HÖSPA Ø 4.0

| Installed length | Extension length | Load capacity | Cat. No.   |
|------------------|------------------|---------------|------------|
| 300 mm           | 275 mm           | 35 kg         | 432.23.421 |
| 350 mm           | 335 mm           | 35 kg         | 432.23.422 |
| 400 mm           | 400 mm           | 50 kg         | 432.23.423 |
| 450 mm           | 450 mm           | 50 kg         | 432.23.424 |
| 500 mm           | 500 mm           | 60 kg         | 432.23.425 |
| 550 mm           | 550 mm           | 60 kg         | 432.23.426 |
| 600 mm           | 600 mm           | 68 kg         | 432.23.427 |
| 650 mm           | 650 mm           | 68 kg         | 432.23.428 |
| 700 mm           | 700 mm           | 68 kg         | 432.23.429 |