


Accuride DZ5306DO telescopic slide with lock-in hold




The correct side space dimension is critical for the runner to work. You must allow between +0.2mm and +0.5mm over the runner thickness.

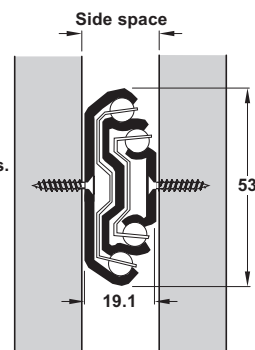

10

Drawer Side Systems, Drawers and Runners: Runners

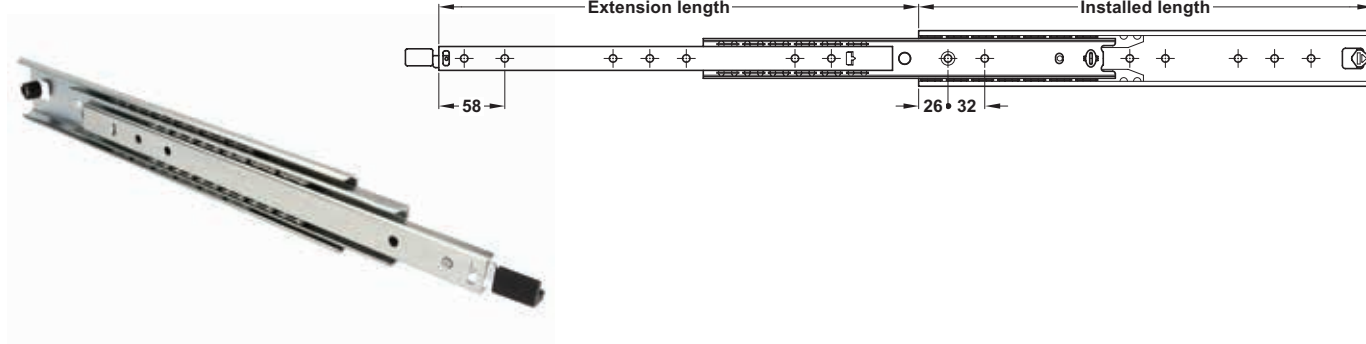

- > Side mounted
- > For applications where you need to unlock the drawer when closed and hold out when open
- > Load carrying capacity up to 120 kg
- > Not for flat mounting
- > Lock in with lever and Hold out facility
- > Front lever lock release
- > Temperature range -30°C to 70°C
- > Can be used as a pair or with Accuride 5321 runners as a companion slide
- > Bright zinc-plated
- > Order quantity 1 pair



Optional mounting brackets for bottom or shelf mounting, shown on page **10.260**



Installed length	Extension length	Load capacity	Cat. No.
300 mm	323 mm	90 kg	420.79.101
350 mm	373 mm	90 kg	420.79.102
400 mm	423 mm	100 kg	420.79.103
450 mm	473 mm	110 kg	420.79.104
500 mm	523 mm	120 kg	420.79.105
550 mm	573 mm	110 kg	420.79.106
600 mm	623 mm	100 kg	420.79.107
700 mm	723 mm	85 kg	420.79.108
790 mm	803 mm	80 kg	420.79.109

PAGE CREATED
13.02.26