



Accuride 9301 extra heavy duty runners, full extension



Mounting brackets available
shown on page **10.265**

The correct side space
dimension is critical for
the runner to work.
You must allow between
+0.2mm and +0.5mm
over the runner thickness.

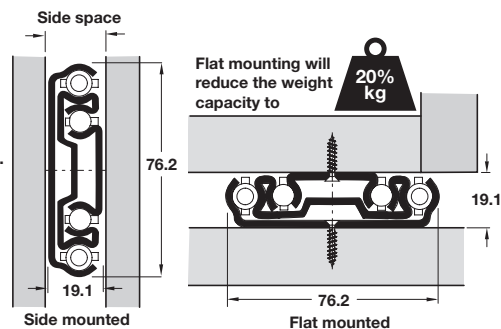

- > Can be side mounted or base and top mounted using brackets, for use as a pull out storage unit
- > M6 hexagonal head screw can be used with these runners
- > Load carrying capacity up to 272 kg (see below for individual runner capacity)
- > Zinc-plated steel
- > *Corrosion resistant up to 500 hours, stainless steel ball retainer, ball bearings food grade grease
- > Please note: Weight limit per pair based on length, weight limits reduce by 80% if flat mounted
- > Order fixing screws separately (max. head height 4.8 mm, Ø 12.7 mm)
- > Order qty: 1 pair

ARTICLES REMOVED FROM PAGE

422.46.625 Replaced by new number 422.10.125
422.46.630 Replaced by new number 422.10.130
422.46.635 Replaced by new number 422.10.135
422.46.640 Replaced by new number 422.10.140
422.46.645 Replaced by new number 422.10.145
422.46.650 Replaced by new number 422.10.150
422.46.655 Replaced by new number 422.10.155
422.46.660 Replaced by new number 422.10.160
422.46.665 Replaced by new number 422.10.165
422.46.670 Replaced by new number 422.10.170
422.46.675 Replaced by new number 422.10.175
422.46.680 Replaced by new number 422.10.180
422.46.685 Replaced by new number 422.10.185
422.46.690 Replaced by new number 422.10.190
422.46.692 Replaced by new number 422.10.192
422.46.693 Replaced by new number 422.10.193
422.46.694 Replaced by new number 422.10.194
422.46.696 Replaced by new number 422.10.196
422.46.697 Replaced by new number 422.10.197
422.46.698 Replaced by new number 422.10.198
422.46.725 Replaced by new number 422.10.225
422.46.730 Replaced by new number 422.10.230
422.46.735 Replaced by new number 422.10.235
422.46.740 Replaced by new number 422.10.240
422.46.745 Replaced by new number 422.10.245
422.46.750 Replaced by new number 422.10.250
422.46.755 Replaced by new number 422.10.255
422.46.760 Replaced by new number 422.10.260
422.46.765 Replaced by new number 422.10.265
422.46.770 Replaced by new number 422.10.270
422.46.775 Replaced by new number 422.10.275
422.46.780 Replaced by new number 422.10.280
422.46.785 Replaced by new number 422.10.285
422.46.790 Replaced by new number 422.10.290
422.46.792 Replaced by new number 422.10.292
422.46.793 Replaced by new number 422.10.293
422.46.794 Replaced by new number 422.10.294
422.46.796 Replaced by new number 422.10.296



Installed length	Extension length	Load capacity
254 mm	254 mm	272 kg
305 mm	305 mm	272 kg
356 mm	356 mm	272 kg
406 mm	406 mm	272 kg
457 mm	457 mm	272 kg
508 mm	508 mm	272 kg
559 mm	559 mm	272 kg
610 mm	610 mm	267 kg
660 mm	660 mm	264 kg
711 mm	711 mm	261 kg
762 mm	762 mm	258 kg
813 mm	813 mm	256 kg
864 mm	864 mm	253 kg
914 mm	914 mm	248 kg
1016 mm	1016 mm	237 kg
1067 mm	1067 mm	228 kg
1118 mm	1118 mm	218 kg
1219 mm	1219 mm	182 kg
1371 mm	1371 mm	196 kg
1524 mm	1524 mm	182 kg

Bright	*Corrosion resistant
422.10.125	422.10.225
422.10.130	422.10.230
422.10.135	422.10.235
422.10.140	422.10.240
422.10.145	422.10.245
422.10.150	422.10.250
422.10.155	422.10.255
422.10.160	422.10.260
422.10.165	422.10.265
422.10.170	422.10.270
422.10.175	422.10.275
422.10.180	422.10.280
422.10.185	422.10.285
422.10.190	422.10.290
422.10.192	422.10.292
422.10.193	422.10.293
422.10.194	422.10.294
422.10.196	422.10.296
422.10.197	-
422.10.198	-

PAGE AMENDED
21.11.23/1