




Accuride 9308 drawer runners, full extension with lock-out facility

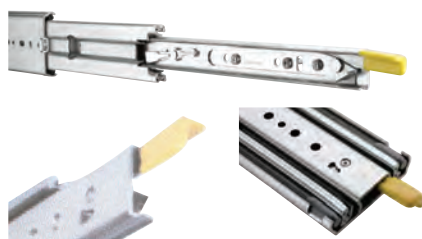

The correct side space dimension is critical for the runner to work. You must allow between +0.2mm and +0.5mm over the runner thickness.



Front lever lock release

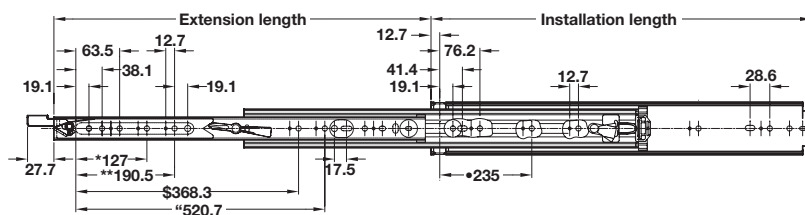

*Lengths 457.2 and above
 **Lengths 558.8 and above
 \$Lengths 914.4 and above
 "Lengths 864.6, 914, 1219.2 and 1524 only
 *Lengths 762 and above



Mounting brackets available shown on page 10.265

- > Can be side mounted or base and top mounted using brackets
- > Ideal for heavy duty tool boxes, battery trays and mobile applications
- > Load carrying capacity up to 272 kg (see below for individual runner capacity)
- > Not for flat mounting
- > Lock in and out facility
- > Front lever lock release
- > Bright zinc-plated steel
- > Order fixing screws separately (max. head height 4.8 mm, Ø 12.7 mm)
- > Order qty: 1 pc



Installed/Extension length	Load capacity	Left hand	Right hand
304.8 mm	272 kg	422.33.740	422.33.741
355.6 mm	272 kg	422.33.742	422.33.743
406.4 mm	272 kg	422.33.744	422.33.745
457.2 mm	272 kg	422.33.746	422.33.747
508 mm	272 kg	422.33.748	422.33.749
558.8 mm	272 kg	422.33.750	422.33.751
609.6 mm	272 kg	422.33.752	422.33.753
660.4 mm	267 kg	422.33.754	422.33.755
711.2 mm	264 kg	422.33.756	422.33.757
762 mm	258 kg	422.33.758	422.33.759
812.8 mm	256 kg	422.33.760	422.33.761
863.6 mm	253 kg	422.33.762	422.33.763
914.4 mm	248 kg	422.33.764	422.33.765
1016 mm	237 kg	422.33.766	422.33.767
1066.8 mm	228 kg	422.33.768	422.33.769
117.6 mm	218 kg	422.33.770	422.33.771
1219.2 mm	204 kg	422.33.772	422.33.773
1371.6 mm	196 kg	422.33.774	422.33.775
1524 mm	182 kg	422.33.776	422.33.777



Load ratings vary according to runner length. Load rating shown is for side mounting, base mounting reduces load rating to 25% of vertical rating. We recommend that a centrally positioned pull handle is used on wide drawers. Please contact us for further information if required