




Accuride 2421 drawer runners, single extension

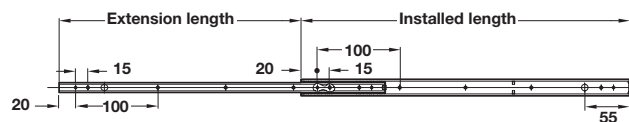

The correct side space dimension is critical for the runner to work. You must allow between +0.2mm and +0.5mm over the runner thickness.



- > Side mounting
- > Load carrying capacity up to 16 kg (see below for individual runner capacity)
- > Low profile: 20 mm high
- > Bright zinc-plated steel
- > Order fixing screws separately (max. head height 1.8 mm, Ø 5.6 mm)
- > Order qty: 1 pair





Installed length	Extension length	Load capacity	Cat. No.
250 mm	182 mm	15 kg	432.29.925
300 mm	220 mm	16 kg	432.29.930
350 mm	257 mm	16 kg	432.29.935
400 mm	294 mm	15 kg	432.29.940
450 mm	331 mm	13 kg	432.29.945

Accuride 2431 drawer runners, full extension



The correct side space dimension is critical for the runner to work. You must allow between +0.2mm and +0.5mm over the runner thickness.

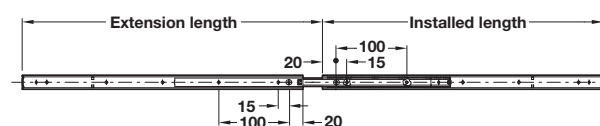

- > Side mounting
- > Load carrying capacity up to 20 kg (see below for individual runner capacity)
- > Low profile: 20 mm high
- > Bright zinc-plated steel
- > Order fixing screws separately (max. head height 1.8 mm, Ø 5.6 mm)
- > Order qty: 1 pair



Installed length	Extension length	Load capacity	Cat. No.
150 mm	156 mm	15 kg	432.30.915
200 mm	231 mm	17 kg	432.30.920
250 mm	280 mm	19 kg	432.30.925
300 mm	329 mm	20 kg	432.30.930
350 mm	379 mm	20 kg	432.30.935
400 mm	428 mm	18 kg	432.30.940
450 mm	477 mm	16 kg	432.30.945
500 mm	526 mm	13 kg	432.30.950