

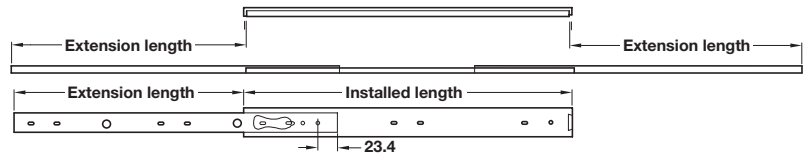


Accuride 2026 drawer runners, two way travel, single extension



The correct side space dimension is critical for the runner to work. You must allow between +0.2mm and +0.5mm over the runner thickness.



10

Drawer Side Systems, Drawers and Runners: Runners

- > Side mounting
- > Use for pull through drawers when access is required from both sides of unit
- > Load carrying capacity up to 50 kg (see below for individual runner capacity)
- > Two-way travel
- > Hold-out at either end
- > Bright zinc-plated steel
- > Order fixing screws separately (max. head height 2.5 mm, Ø 9.6 mm)
- > Order qty: 1 pair



Installed length	Extension length	Load capacity	Cat. No.
300 mm	208.8 mm	50 kg	420.45.930
350 mm	246.1 mm	50 kg	420.45.935
400 mm	283.4 mm	45 kg	420.45.940
500 mm	358.0 mm	40 kg	420.45.950
600 mm	432.6 mm	35 kg	420.45.960