




Accuride 2726 drawer runners with two way travel, single extension

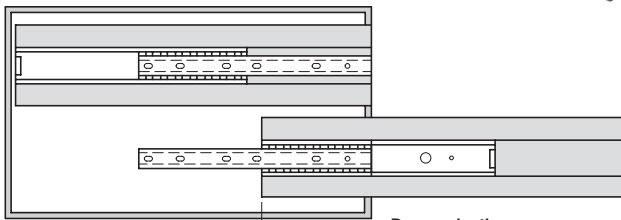

To achieve optimum travel, locate rear of drawer member at rear of drawer and front of cabinet member as far forward as possible



- > Achieves maximum travel with a single extension runner
- > 27 mm groove or surface side mounting
- > Additional holes in drawer member for surface mounting
- > M4 threaded hole on drawer member
- > 32 mm hole pattern on cabinet member
- > Bright zinc-plated steel
- > Order fixing screws separately
- > Order qty: 1 pair

The correct side space dimension is critical for the runner to work. You must allow between +0.2mm and +0.5mm over the runner thickness.

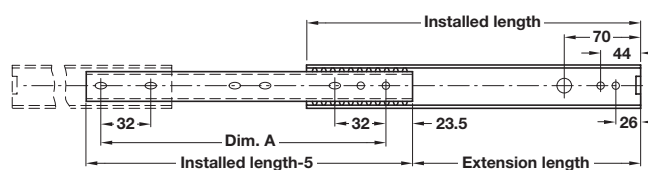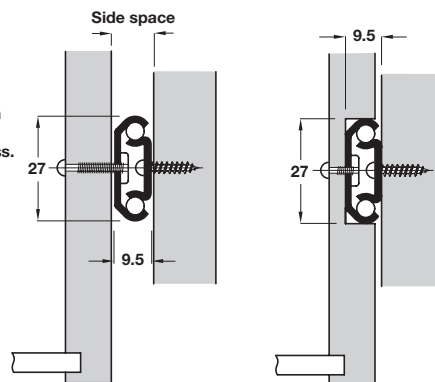

For drawer depth	Installed length	Extension length (x2)	Dim. A	Load capacity	Cat. No.
400-680 mm	400 mm	284 mm	352 mm	15 kg	420.99.940

Accuride 6026 drawer runners, two way travel, single extension

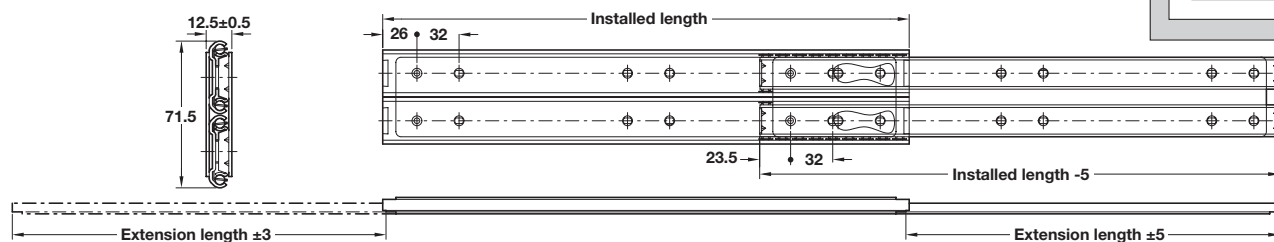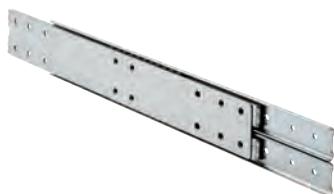

- > Use for pull through drawers when access is required from both sides of unit
- > Load carrying capacity up to 100 kg (see below for individual runner capacity)
- > Two-way travel
- > Bright zinc-plated steel
- > Order fixing screws separately (max. head height 2.5 mm, Ø 9.6 mm)
- > Order qty: 1 pair



Installed length	Extension length	Load capacity	Cat. No.
350 mm	247 mm	85 kg	420.45.902
400 mm	284 mm	90 kg	420.45.903
450 mm	321 mm	95 kg	420.45.904