


Swivel castor, special use, plate fixing



Photo shows version with brake

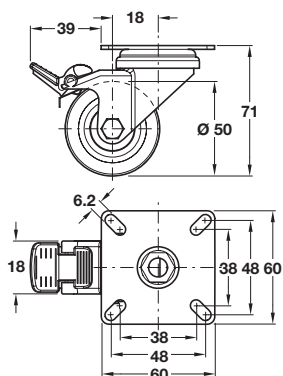


- > With screw on 60 x 60 mm mounting plate
- > Galvanized steel housing with black polyamide wheel with grey solid rubber tyre
- > Order qty: 1 pc



Wheel Ø	Load capacity	Without brake	With brake
Ø 50 mm	40 kg	663.06.910	663.16.910

Fixed castor, special use, plate fixing



- > Fixed castor; without swivel
- > With screw on 60 x 60 mm mounting plate
- > Galvanized steel housing with black polyamide wheel with grey solid rubber tyre
- > Order qty: 1 pc




Wheel Ø	Load capacity	Without brake
Ø 50 mm	40 kg	663.07.910

Twin wheel swivel castor, hooded, Ø 50 mm wheels, plate fixing



Photo shows version without brake



- > With 38 x 38 mm mounting plate
- > 25 x 25 mm screw hole distances
- > Matt black plastic
- > Order qty: 1 pc




Wheel Ø	Load capacity	Without brake	With brake
Ø 50 mm	45 kg	660.63.352	660.63.353

Twin wheel swivel castor, hooded, Ø 50 mm wheels, M8 thread fixing



Photo shows version without brake



- > With M8 x 16 mm threaded bolt
- > Suitable for use on soft floor coverings such as carpet
- > Matt black plastic
- > Order qty: 1 pc



M8 T-nut for mounting thread fixing castors under wooden bases are shown on page 11.25

Wheel Ø	Load capacity	Without brake	With brake
Ø 50 mm	40 kg	660.66.352	660.66.353