


CASTORS WITH Ø 75 MM WHEELS

Twin wheel swivel castor, Ø 75 mm wheels, with Ø 10 mm pin hole



Photo shows version with brake



- > For use with Ø 10 mm pin
- > Aluminium coloured plastic housing, dark grey non-marking rubber wheel and black plastic brake
- > Order qty: 1 pc



Ø 10 mm pin and mounting plates are shown on pages **11.24-25**

Wheel Ø	Load capacity	Without brake	With brake
Ø 75 mm	50 kg	660.91.925	660.90.925


Swivel castor, special use, Ø 75 mm wheel, plate fixing



Without brake



With brake

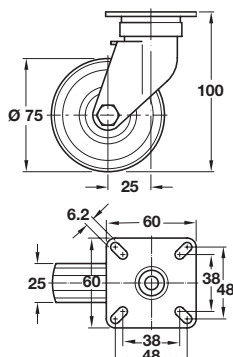


- > With screw on 60 x 60 mm mounting plate
- > Galvanized steel housing with black polyamide wheel with grey grooved rubber tyre
- > Order qty: 1 pc



Wheel Ø	Load capacity	Without brake	With brake
Ø 75 mm	60 kg	663.06.920	663.16.920

Fixed castor, special use, Ø 75 mm wheel, plate fixing



- > Fixed castor; without swivel
- > With screw on 60 x 60 mm mounting plate
- > Galvanized steel housing with black polyamide wheel with grey grooved rubber tyre
- > Order qty: 1 pc



Wheel Ø	Load capacity	Without brake
Ø 75 mm	60 kg	663.07.920