


CASTORS WITH Ø 100 MM WHEELS

Swivel castor, Ø 100 mm wheel, plate fixing



- > With screw on 100 x 85 mm mounting plate
- > Two enclosed ball races are fitted in the ring mount
- > Maintenance free roller bearings in the hollow steel hubs secured with hub nuts
- > Galvanized steel bracket and wheel, solid rubber profiled tyre
- > Order qty: 1 pc


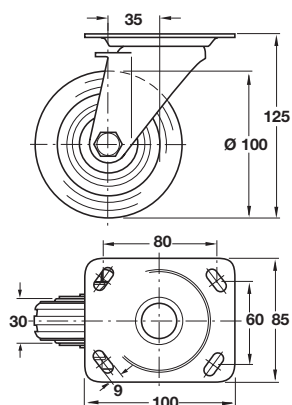


Wheel Ø	Load capacity	Without brake
Ø 100 mm	70 kg	670.01.218

Swivel castor, Ø 100 mm wheel, plate fixing



- > With screw on 100 x 85 mm mounting plate
- > Foot operated brake stops wheel rotation and rolling action simultaneously when brake pedal is applied
- > Brake is adjustable to compensate for tread, wear and tear
- > Two enclosed ball races are fitted in the ring mount
- > Maintenance free roller bearings in the hollow steel hubs secured with hub nuts
- > Galvanized steel bracket and wheel, solid rubber profiled tyre
- > Order qty: 1 pc

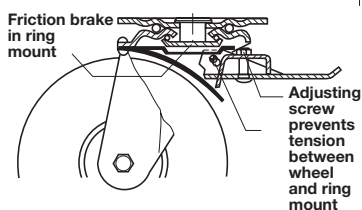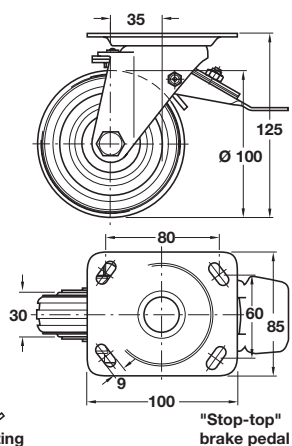

Wheel Ø	Load capacity	With brake
Ø 100 mm	70 kg	670.03.212