


Accuride 1234 pivot sliding door runners



- > Black zinc-plated steel
- > Order qty: 1 pair (per door)

Installed length	Extension length	Dim. A	Dim. B
354 mm	239 mm	- 224	
405 mm	289 mm	- 320	
456 mm	340 mm	- 352	
506 mm	391 mm	- 416	
557 mm	442 mm	352	480
608 mm	493 mm	352	480

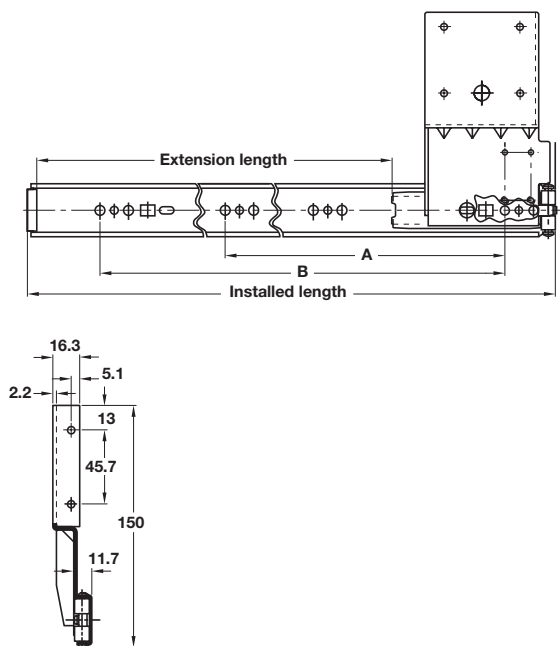

Installed length	Cat. No.
354 mm	408.35.336
405 mm	408.35.341
456 mm	408.35.346
506 mm	408.35.351
557 mm	408.35.356
608 mm	408.35.361

TIOMOS hinge, for inset doors



- > Opening angle 110°
- > Sprung, **soft close**
- > Ø 35 mm screw fixing with click on arm
- > For door thickness 16-20 mm
- > Distance to cup 6 mm
- > Steel cup and hinge arm
- > Order qty: 1 pc (order 2 pcs per door)



Mounting plate 348.38.512 (2 mm height) must be ordered separately, visit www.hafele.co.uk for details

Type	Cat. No.
With soft close	348.31.802

Click-on hinge, for half overlay doors



Maximum overlay 5 mm, using a 10 mm cup to distance measurement



Mounting plate 322.85.750 (0 mm height) must be ordered separately, shown below

- > Opening angle 95°
- > 0 mm crank
- > Sprung
- > Ø 40 mm screw fixing cup with click on arm
- > Door thickness from 16-20 mm. If door is thicker, overlay reduces ie. 22 mm door thickness = 8 mm overlay
- > Nickel-plated steel cup and zinc alloy arm
- > Order qty: 1 pc (order 2 pcs per door)



Type	Cat. No.
Without soft close	322.13.630

Super compact cruciform mounting plate



- > Screw fixing, for click-on system hinges
- > Two part plate with external height adjustment
- > Nickel-plated zinc alloy and pressed steel
- > Order qty: Multiples of 10 pcs



Height	Cat. No.
0 mm	322.85.750