


HECO-MULTI-MONTI CONCRETE AND MASONRY SCREWS

Stress free fixing solution in brick, masonry, stone and concrete. Close to edge and grouped installation are also possible.



Please order screws in multiples of order quantity shown

Heco-Multi-Monti-plus, hex head with combined washer

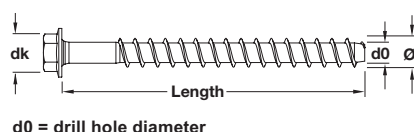


d0 = drill hole diameter

- > Easy to install
- > Suitable for bricks, solid sand-lime brick, perforated sand-lime brick and lightweight concrete
- > Fire resistance class RF120/F120
- > Meets sprinkler systems requirements for VdS guideline CEA 4001
- > Suitable for regions with seismic risk category C1 & C2
- > Hexagon head with fixed washer
- > Bright zinc plated carbon steel

Ø x length	d0	tfix	Washer Ø	Drive	Cat. No.	Order Qty
7.5 x 35 mm	6.0	1/(10)	14	SW10	019.10.300	100
7.5 x 40 mm	6.0	5/(15)	14	SW10	019.10.301	100
7.5 x 50 mm	6.0	15/(25)	14	SW10	019.10.302	50
10 x 60 mm	8.0	10	19	SW13	019.10.303	25
10 x 80 mm	8.0	15/30	19	SW13	019.10.304	25
10 x 100 mm	8.0	35/50	19	SW13	019.10.305	25
10 x 120 mm	8.0	55/70	19	SW13	019.10.306	25
10 x 140 mm	8.0	75/90	19	SW13	019.10.307	25
10 x 160 mm	8.0	95/110	19	SW13	019.10.308	25
12 x 120 mm	10.0	30/45	22	SW15	019.10.316	25
12 x 140 mm	10.0	50/65	22	SW15	019.10.317	25
12 x 160 mm	10.0	70/85	22	SW15	019.10.318	25

Heco-Multi-Monti-plus, pan head



d0 = drill hole diameter

- > Easy driving and high load bearing capacities
- > Suitable for bricks, solid sand-lime brick, perforated sand-lime brick and lightweight concrete
- > Fire resistance class RF120/F120
- > Meets sprinkler systems requirements for VdS guideline CEA 4001
- > Suitable for regions with seismic risk category C1 & C2
- > Pan head
- > T-drive
- > Fully threaded
- > Bright zinc plated carbon steel

Ø x length	d0	tfix	Washer Ø	Drive	Cat. No.	Order Qty
7.5 x 40 mm	6.0	5/(15)	14.5	T-30	019.10.270	100
7.5 x 50 mm	6.0	15/(25)	14.5	T-30	019.10.271	100
7.5 x 60 mm	6.0	5/25/(35)	14.5	T-30	019.10.272	50