


WALL PLUGS, DOWELS AND CAVITY FIXINGS



Please order wall plugs in multiples of order quantity shown


Fischer UX universal wall plug



- > Suitable for concrete, solid masonry, perforated stones, gas concrete, lightweight wallboards, plasterboard
- > Can be used with all kinds of screws; chipboard screws, wood screws and wood-to-metal threaded screws
- > With flexible point, suitable for different screw diameters
- > For screw sizes:
 - Ø 4-5 mm (Ø 6 drill)
 - Ø 4.5-6 mm (Ø 8 drill)
- > High quality polyamide (nylon), resistant to weathering ageing, corrosion and rotting

Length	Drill Ø	Drill depth	Dim. A (Min)	Cat. No.	Order Qty
35 mm	6 mm	Min. 45 mm	9.5 mm	051.70.001	100
50 mm	8 mm	Min. 60 mm	9.5 mm	051.70.002	100

Fischer S wall plug

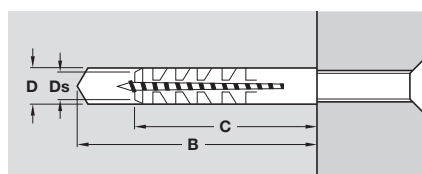

B = Min. hole depth
C = Length
D = Drill Ø
Ds = To suit wood and Hopsa screw size

- > For wood or chipboard screws
- > Suitable for all concrete and wall building materials, from perforated bricks to gas concrete and lightweight construction panels
- > 2-way expansion
- > High tensile and compression strength at temperatures from -40°C to +80°C
- > The locking lugs prevent turning in the drilled hole
- > Grey nylon

Type	Ø D	B	C	Ø Ds	Cat. No.	Order Qty
S6	6 mm	40 mm	30 mm	4-5 mm	051.40.018	100
S8	8 mm	55 mm	40 mm	4.5-6 mm	051.40.027	100