


Wall plug



> Plastic

Colour	Ø x Length	To suit screw size	Cat. No.	Order Qty
Blue	10 x 45 mm	4.5-6.0 mm	051.12.804	100
Brown	7 x 40 mm	4.0-6.0 mm	051.12.103	100
Red	6 x 32 mm	3.5-5.0 mm	051.12.902	100
Yellow	5 x 23 mm	3.0-4.5 mm	051.12.601	100

Plasterboard GK Fischer dowel

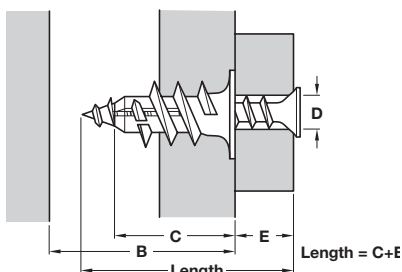

Key

B = 25 mm minimum thickness up to first layers

C = 22 mm overall length

D = Ø 4 to 5 mm screws

E = maximum working length

Determining minimum screw length

Dowel length 22 mm

+ Fastening thickness of adjacent structural member

= minimum screw length

> Only small amount of space necessary behind the board, as dowel supplied with a tool which allows the dowel to be inserted 'form-closed' in the plasterboard, not behind the board

> Grey nylon

> Fixing advantages:

Pre-drilling with electric drill not necessary

Insertion tool is also suitable for inserting the screw

Adapted for wood, self-tapping and chipboard screws Ø 4 - 5 mm

Insertion tool for boring jig installation included

1 composing tool included

> Suitable for:

Plasterboard, rear insulated plasterboard

For fastening lamps, skirting, electric switches, picture frames, cable trunking, curtain rails, wooden borders, etc


> Not suitable for:

Fibre plasterboard or tiled plasterboard

> Order qty: Multiples of 100 pcs

To suit screw size	Cat. No.
Ø 4 - 5 mm	051.63.000

Fischer GKM plasterboard dowel



> Grey metal dowel, adapted for wood, self-tapping and chipboard screws

> Pan head plasterboard screw and pozi screwdriver bit included

> Suitable for plasterboard, rear insulated plasterboard

> Not suitable for tiled plasterboard

> Order qty: Multiples of 100 pcs

Length	Min. drill depth	For screw size	Cat. No.
31 mm	35 mm	Ø 4-5 mm	051.69.000