


HÄFELE PACOFIX CONNECTORS

- > For securing trims and cladding panels directly to walls with no wooden subframe
- > For construction of cavity-type doors to accommodate sound insulating material or cable ducting
- > For ceiling claddings as well as walls
- > All panels, once installed, can be easily removed at any time and with no special tools
- > Advantages
 - Easy pre-planning
 - Wide range of designs with different panel materials and other materials
 - Systematic design with prefabricated parts
 - Quick, easy dismantling at any time
 - Reusable, recyclable

- ! > Supporting plastic fittings may not be treated with chemical solvents or aggressive greases
- > Black plastic (polycarbonate) has a temperature stability from -100°C to +135°C



Häfele Pacofix SF/DL-L panel component, with lip

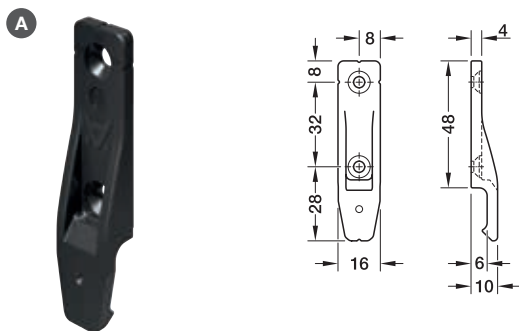


- > Screw fixing with Hospa or Varianta screws
- > Max. load capacity of pair of fittings is 20 kg
- > Black plastic (polycarbonate)
- > Order qty: Multiples of 50 pcs



Angled component C or D must be ordered separately, shown on page 7.117

Mounting with	With lip
Hospa screws	262.49.356
Varianta screws	262.49.357

Häfele Pacofix SF spacer plate

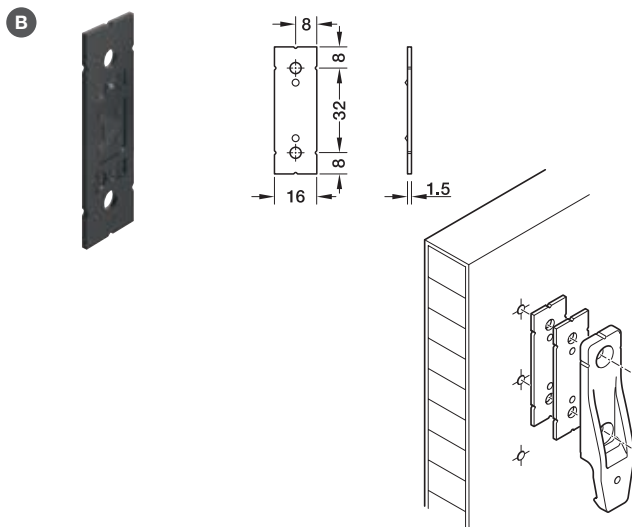

- > For panel component A
- > Black plastic (polycarbonate)
- > Order qty: Multiples of 50 pcs



Mounting with	Cat. No.
Varianta screws	262.49.355



- > Hospa screws are shown on pages 13.6-12
- > Varianta screws are shown on pages 13.22-23