





Häfele Pacofix SF/DL-L panel component

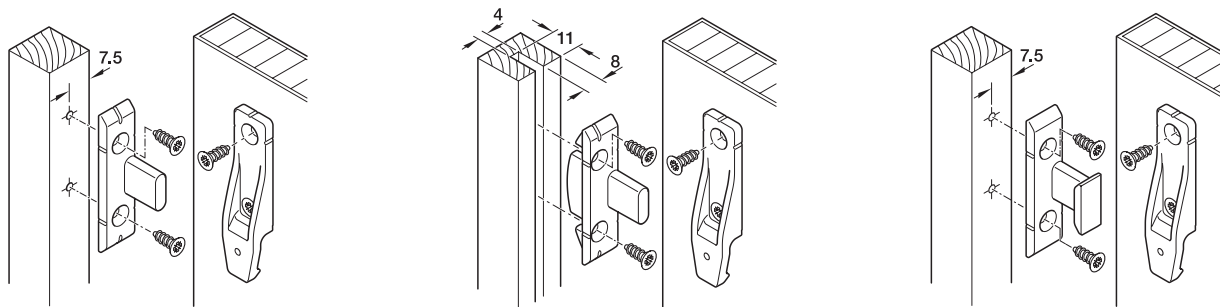


- > Screw fixing with Hospa or Varianta screws
- > Max. load capacity of pair of fittings is 20 kg
- > Panel components without lip are for panels that may need to be removed often
- > Black plastic (polycarbonate)
- > Order qty: Multiples of 50 pcs

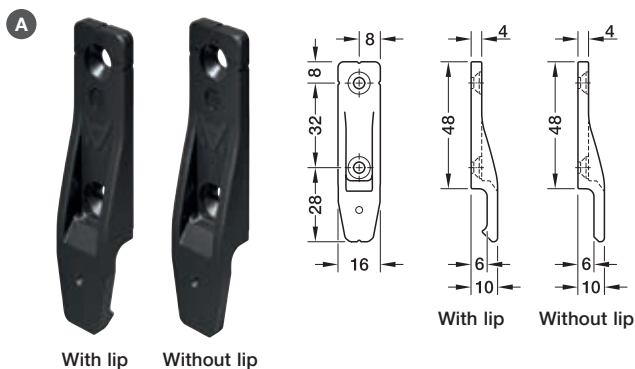


Frame component B, C or D must be ordered separately, shown below and on page 7.119

Mounting with	With lip	Without lip
Hospa screws	262.49.356	262.49.350
Varianta screws	262.49.357	262.49.351

Häfele Pacofix SF-G frame component

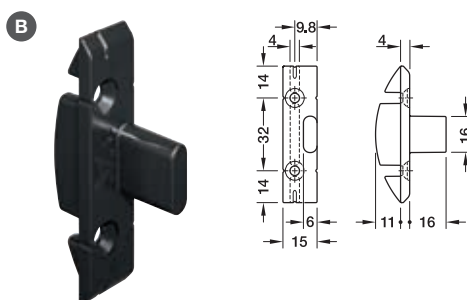

- > Groove mounted
- > Screw fixing with Hospa screws
- > Max. load capacity of pair of fittings:
 - For vertical suspension is 20 kg
 - For horizontal suspension, lying, is 30 kg
 - For horizontal suspension, hanging is 8 kg
- > Black plastic (polycarbonate)
- > Order qty: Multiples of 50 pcs



Mounting with	Cat. No.
Hospa screws	262.49.360



- > Hospa screws are shown on pages 13.6-12
- > Varianta screws are shown on pages 13.22-23