



TRIADE CONCEALED SHELF SUPPORT

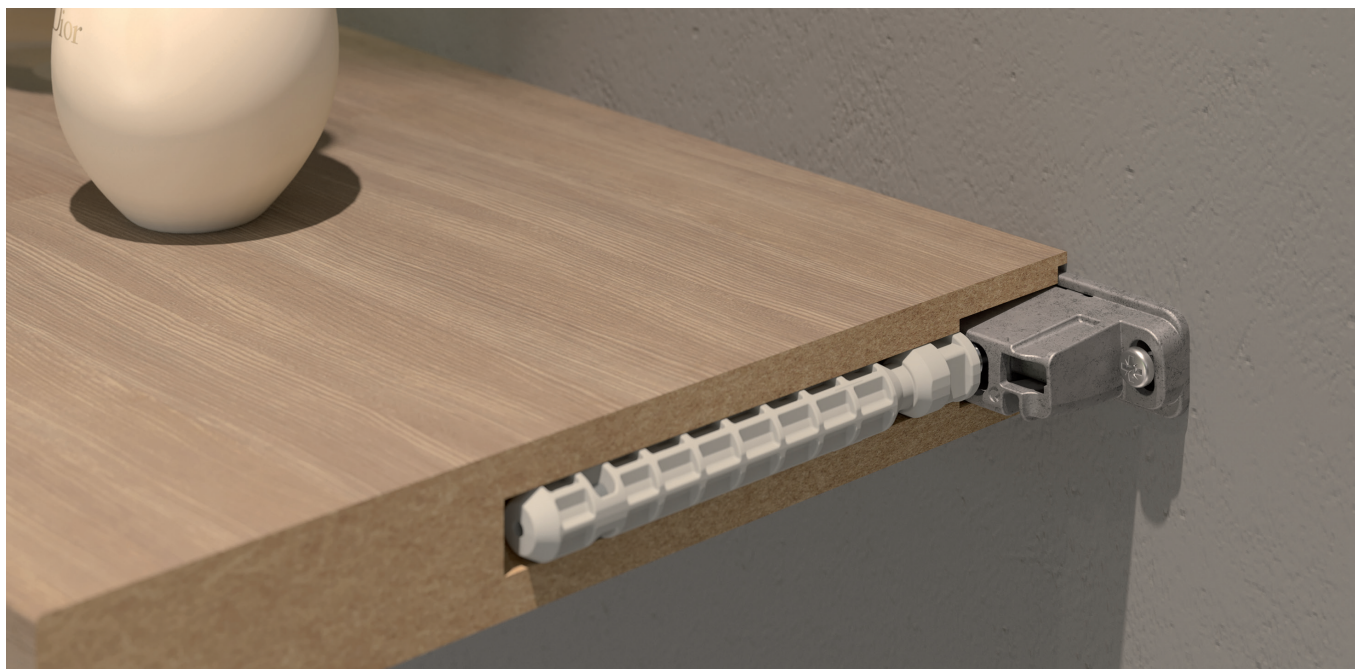


Triade concealed shelf support

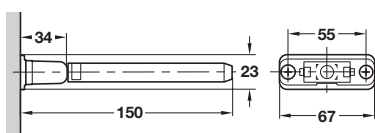


- > Concealed mounting
- > For 25-40 mm shelf thickness
- > Load carrying capacity: 15 kg per support (shelf weight included) for max. shelf depth 300 mm
- > For min. shelf depth 160 mm
- > Zinc alloy and steel
- > Order qty: 1 pc


For shelf thickness 25-30 mm



For shelf thickness above 30 mm

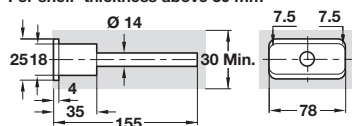

Align brackets vertically accordingly





Step 1- Tilt the shelf to match both supporting pins and shelf housings

Step 2- Adjust the shelf horizontally according to the application (i.e. multi-shelf composition)

Step 1- Turn clockwise the supporting pin with shelf angle front to back accordingly

Step 2- Screw the locking bolt to block the pin

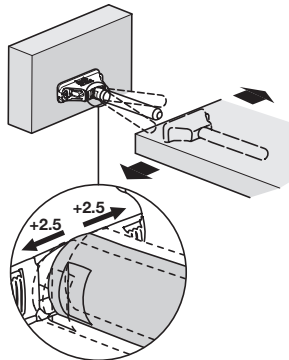

Bracket to improve shelf support load capacity available to order separately, shown on page 137

ARTICLES REMOVED FROM PAGE

283.39.010 Replaced by new number 283.39.053



Fixings not included: Order pan head screws, M5 x 12 mm 020.24.250 separately



Cat. No.

Triade concealed shelf support

283.39.053

PAGE AMENDED
05.08.24/1