

IXCONNECT MINIFIX INDUSTRY BOLTS


Minifix connecting bolts **A** and **B**:

- > Can be screwed directly into a $\varnothing$ 5 mm pre-drilled hole

- > For double-sided constructions

Minifix connecting bolts **C**:

- > With M6 thread are used in conjunction with sleeves or dowels for installation in $\varnothing$ 8 mm or $\varnothing$ 10 mm pre-drilled holes
- > For single-sided constructions

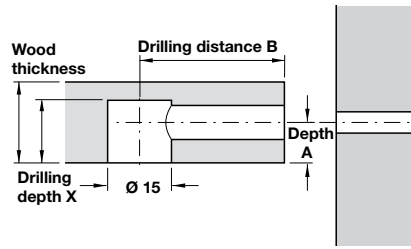

Cross slot


Tighten with PZ2 screwdriver only (cross slot size 2)



Combination slot

Tighten with PZ2 screwdriver or flat bladed screwdriver

Minifix M100 connecting bolt




- > For direct, screw-in installation in $\varnothing$ 5 mm holes
- > With special thread
- > Steel
- > Order qty: Multiples of 100 pcs



Drilling distance B	24 mm	34 mm
Bright	262.27.611	262.28.611

Minifix M200 connecting bolt




- > For direct, screw-in installation in $\varnothing$ 5 mm holes
- > With special thread
- > Steel
- > Order qty: Multiples of 100 pcs



Drilling distance B	24 mm	34 mm
Galvanized	262.27.627	262.28.624

Minifix M200 connecting bolt



- > With M6 thread, for screwing into sleeves or dowels for installation in $\varnothing$ 8 mm or $\varnothing$ 10 mm holes
- > Steel
- > Order qty: Multiples of 100 pcs



Screw in sleeves and dowels with M6 internal thread are shown on page 7.63

Drilling distance B	34 mm
Galvanized	262.28.642

PAGE AMENDED
14.06.24/1