



## IXCONNECT MINIFIX C100 SPREADING BOLTS

- > For industry, joiners and cabinet makers
- > Connecting bolt for universal use within the Minifix connector system with special benefits:  
Extremely installation-friendly, no tools are required  
Drilling depth stop ensures ideal bolt position  
No surface damage caused by insertion and removal of spreading bolt

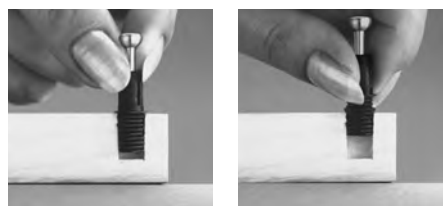


Plug in

Unscrew

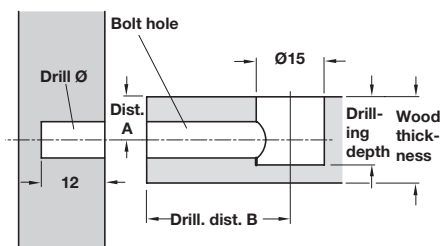


- Bolt hole** = Ø 8 mm
- Drilling depth** = depending on housing type and wood thickness (see table)
- Drill Ø** = Ø 5 mm, Ø 8 mm or Ø 10 mm depending on type of bolt
- Distance A** = 1/2 wood thickness (see Minifix pages 12/15 housings)
- Drilling distance B** = optional between B 24 (24 mm) or B 34 (34 mm), drilling distance housing centre to front edge

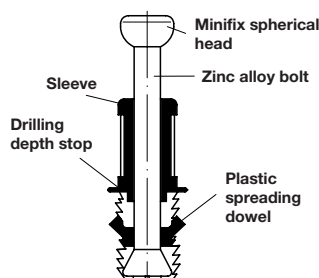

## Minifix C100 Ø 8 mm spreading bolt



- > For press-fit installation in Ø 8 mm pre-drilled holes
- > For wood thickness from 15 mm
- > Zinc alloy bolt with black plastic spreading dowel with harpoon thread
- > Order qty: Multiples of 100 pcs

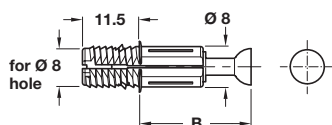


| Drilling distance B | 24 mm      | 34 mm      |
|---------------------|------------|------------|
| Cat. No.            | 262.09.202 | 262.09.302 |

## Minifix C100 Ø 10 mm spreading bolt



- > For press-fit installation in Ø 10 mm pre-drilled holes
- > Zinc alloy bolt with grey plastic spreading dowel with harpoon thread
- > Order qty: Multiples of 100 pcs

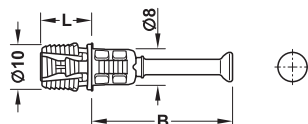

| Drilling distance B            | 24 mm      | 34 mm      |
|--------------------------------|------------|------------|
| <b>Thread length L 11.5 mm</b> |            |            |
| Cat. No.                       | 262.09.213 | 262.09.313 |