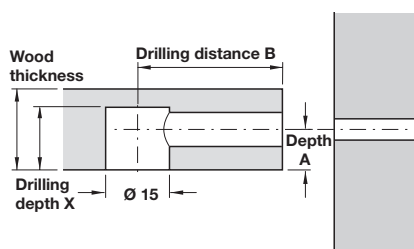


IXCONNECT MINIFIX S100 STANDARD BOLTS

- > Minifix connecting bolts **A**:
- > With M4 thread are used in conjunction with sleeves or dowels for installation in Ø 5 mm, Ø 8 mm or Ø 10 mm pre-drilled holes
- > For both single and double-sided constructions
- > Minifix connecting bolts **B**:
- > With M6 thread are used in conjunction with sleeves or dowels for installation in Ø 8 mm or Ø 10 mm pre-drilled holes
- > For single-sided constructions




Cross slot
Tighten with PZ2 screwdriver only (cross slot size 2)



Combination slot
Tighten with PZ2 screwdriver or flat bladed screwdriver

Minifix S100 connecting bolt

A


- > With M4 thread, for screwing into sleeves or dowels for installation in Ø 5 mm, Ø 8 mm or Ø 10 mm holes
- > Steel
- > Order qty: Multiples of 100 pcs



Screw in sleeves and dowels with M4 internal thread are shown on pages **13.40-41**

Drilling distance B	34 mm
Bright	262.28.035

Minifix S100 connecting bolt

B

- > With M6 thread, for screwing into sleeves or dowels for installation in Ø 8 mm or Ø 10 mm holes
- > Steel
- > Order qty: Multiples of 100 pcs



Screw in sleeves and dowels with M6 internal thread are shown on page **7.63**

Drilling distance B	24 mm	34 mm
Thread length 7.5 mm		
Bright	262.27.047	262.28.044
Galvanized	-	262.28.946
Thread length 12 mm		
Bright	-	262.28.041
Galvanized	262.27.941	262.28.941