



IXCONNECT MINIFIX STANDARD S200 BOLTS

- > Minifix S200 bolts with Ø 6.5 mm bolt head and swivelling sleeve, ring on bolt shaft holds plastic sleeve in place
- > Minifix connecting bolts **A**:
 - > With harpoon-type thread are for screw-in installation in Ø 5 mm pre-drilled holes
- > Minifix connecting bolts **B**:
 - > With M6 thread are used in conjunction with sleeves or dowels in Ø 8 mm or Ø 10 mm pre-drilled holes

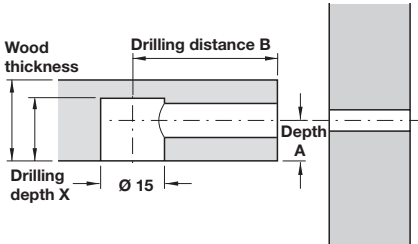

- Cross slot**
Tighten with PZ2 screwdriver only (cross slot size 2)
- Combination slot**
Tighten with PZ2 screwdriver or flat bladed screwdriver

Minifix S200 connecting bolt

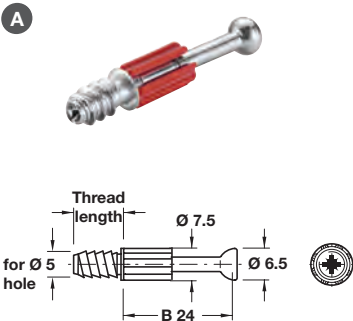


- > For screw-in installation in Ø 5 mm holes
- > Special thread
- > Steel with red plastic sleeve
- > Order qty: Multiples of 100 pcs



Drilling distance B	24 mm	34 mm
Bright	262.27.670	262.28.670
Galvanized	262.27.679	262.28.679

Minifix S200 connecting bolt

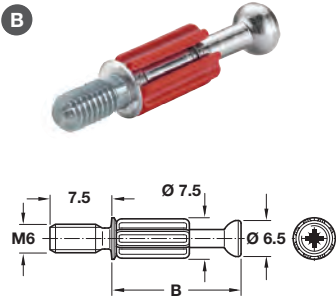

- > With M6 thread for screwing into sleeves or dowels for installation in Ø 8 mm or Ø 10 mm holes
- > Steel with red plastic sleeve
- > Order qty: Multiples of 100 pcs



Drilling distance B	34 mm
Bright	262.28.690

Screw in sleeves and dowels with M6 internal thread are shown on page **7.63**

TCH TECHNOLOGY 2023, © Häfele U.K. Ltd 2023. Dimensional data not binding. We reserve the right to alter specifications without notice.