


Spider concealed cabinet hanger, dowel fixing



Please note: Cabinet hangers should only be adjusted with a hand tool and not a power tool

- > Unhanded
- > Cabinet hanger concealed behind rear panel, only cover cap visible inside the cabinet
- > Slots into cabinet side by making 4 face borings and secured in position by rotating the locking pin with ridges 180°
- > A 3.5 x 20 mm lateral wood screw permanently secures the cabinet hanger in place (not provided)
- > Load carrying capacity 130 kg* per pair
- > Two-way adjustment:
Vertical adjustment: 0-18 mm (Vertical adjustments through front gear cross socket interconnected to the vertical bolt, which reduces the cabinet adjustment effort)
Horizontal adjustment: 11-17 mm
- > Zinc-plated steel
- > Order qty: 1 pc

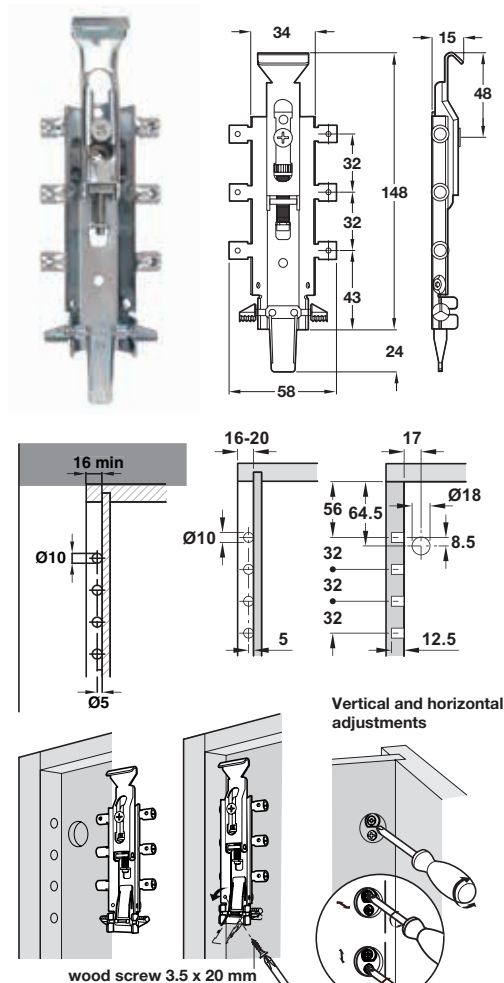


Wall plates and cover caps must be ordered separately, shown below



	Cat. No.
Spider cabinet hanger	290.36.910


Double wall fixing plate, for Spider concealed cabinet hanger

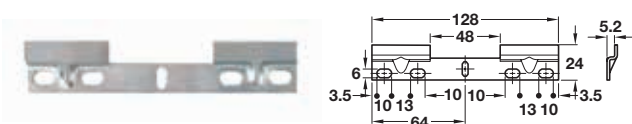


- > For use with Spider concealed cabinet hanger 290.36.910
- > To split in two parts
- > Steel
- > Order qty: Multiples of 10 pcs

Finish	Cat. No.
Zinc-plated	290.35.911

Round cover caps, for Spider concealed cabinet hanger



For Ø 18 mm hole



For Ø 25 mm hole

- > For use with Spider concealed cabinet hanger 290.36.910
- > Nickel-plated zinc alloy
- > Order qty: Multiples of 100 pcs

For hole Ø	Cat. No.
Ø 18 mm	290.36.791
Ø 25 mm	290.36.793



*Load carrying capacity applies to 2 cabinet hangers bearing an evenly distributed load in accordance with regulation DIN 68840