



IXCONNECT MINIFIX SPECIAL BOLTS

- > Connecting bolts for installation through Ø 7 mm and Ø 8 mm holes, without tools
- > For single or double-sided constructions

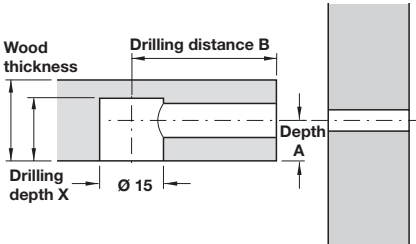

Minifix capped bolt

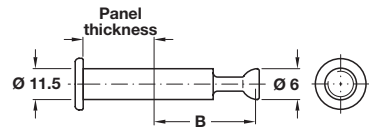


- > For single-sided installation through Ø 8 mm hole
- > Note: Not suitable for use with Minifix polycarbonate housings
- > Steel
- > Order qty: Multiples of 100 pcs



Drilling distance B	34 mm
For panel thickness 16 mm	
Nickel-plated	-
For panel thickness 19 mm	
Nickel-plated	262.28.765

Minifix double-ended bolt

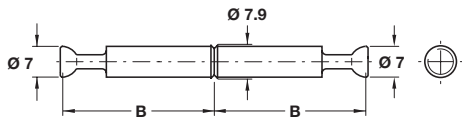


- > With centre ridge for edge-to-edge joints using Ø 7 mm holes
- > Steel
- > Order qty: Multiples of 100 pcs



Drilling distance B	34 mm
Bright	262.28.286

Minifix double-ended bolt

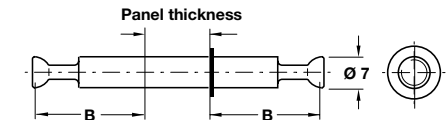

- > With snap ring for double-sided installation through Ø 8 mm holes
- > Steel
- > Order qty: Multiples of 100 pcs



Drilling distance B	34 mm
For panel thickness 19 mm	
Galvanized	262.28.811

TCH TECHNOLOGY 2023, © Häfele U.K. Ltd 2023. Dimensional data not binding. We reserve the right to alter specifications without notice.