


IXCONNECT MAXIFIX UNIVERSAL CONNECTORS


For minimum board thickness of 18 mm.

- > Individual connector to drill in for very strong connections with a high load capacity of wooden components
- > Wide range of applications - e.g. as a worktop connector with double-ended bolt
- > Long tightening distance and rapid tightening with a SW6 hex key
- > Can be tightened using an electric screw driver (SW6 hex key bit)

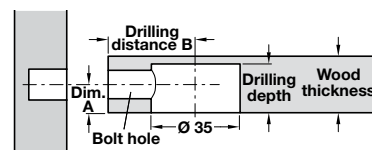

- Bolt hole** = Ø 9 mm
Drilling depth = 15.5 mm or 1/2 wood thickness + 6.5 mm
Distance A = 9.5 mm
Drilling distance B = optional between B 35 (35 mm) or B 55 (55 mm), drilling distance from housing centre to panel front edge

Maxifix housing




- > Wide range of applications
- > For wood thicknesses from 19 mm
- > Drilling depth: 15.5 mm or 1/2 wood thickness + 6.5 mm
- > Zinc alloy
- > Order qty: Multiples of 10 pcs



Finish	SW6	PZ3
Bright	262.87.003	-
Nickel-plated	-	262.87.713

Maxifix cover cap, plastic



- > For Maxifix housings
- > Plastic
- > Order qty: Multiples of 100 pcs




Colour	Cat. No.
Brown	262.87.190
Beige	262.87.490
Nickel coloured lacquered	262.87.690
Black	262.87.390
White	262.87.790



- > Maxifix connecting bolts, suitable for these zinc alloy housings are shown on page 7.27
- > Red jig for Maxifix housings are shown on 7.44-50
- > Variantool-N drilling jig for drilling series-drilled holes for connecting bolts shown on page 7.45

S35 Maxifix connecting bolt




- > Screws directly into Ø 5 mm holes
- > With special thread
- > Galvanized steel
- > Order qty: Multiples of 50 pcs



Bolt length BL	28.5 mm	48.5 mm
Drilling distance B	35 mm	55 mm
Cat. No.	262.87.931	262.87.932

S35 Maxifix connecting bolt



- > Screws into M6 or M8 sleeve
- > Galvanized steel
- > Order qty: Multiples of 50 pcs





Bolt length BL	28.5 mm
Drilling distance B	35 mm
M6 thread	262.87.901



> Screw in sleeves and dowels with M6/M8 internal thread are shown on pages **13.40-41**

Maxifix capped connecting bolt

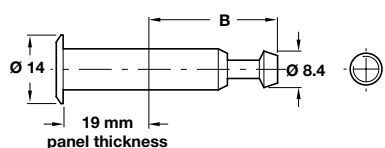



- > For single-sided installation through Ø 9 mm hole
- > Steel
- > Order qty: Multiples of 50 pcs



Drilling distance B	35 mm
Nickel-plated	262.87.781

Maxifix double ended bolt



- > For double-sided installation through Ø 9 mm holes
- > Galvanized steel
- > Order qty: Multiples of 50 pcs



Drilling distance B	35 mm
Cat. No.	262.87.921