
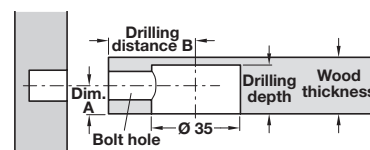


IXCONNECT MAXIFIX UNIVERSAL CONNECTORS


For minimum board thickness of 24 mm.

- > Individual connector to drill in for very strong connections with a high load capacity of wooden components
- > Wide range of applications - e.g. as a worktop connector with double-ended bolt
- > Long tightening distance and rapid tightening with a SW6 hex key
- > Can be tightened using an electric screw driver (SW6 hex key bit)



- Bolt hole** = Ø 10 mm
Drilling depth = 1/2 wood thickness + 7.5 mm^{+0.5}
Distance A = 1/2 wood thickness
Drilling distance B = optional between B 35 (35 mm) or B 55 (55 mm), drilling distance from housing centre to panel front edge

Maxifix housing




- > Wide range of applications
- > For wood thickness from 24 mm
- > Drilling depth: 1/2 wood thickness + 7.5 mm
- > Zinc alloy
- > Order qty: Multiples of 100 pcs



Finish	SW 6
Bright	262.86.003

Maxifix cover cap




- > For Maxifix housing
- > Plastic
- > Order qty: Multiples of 100 pcs



Finish	Cat. No.
White (RAL 9010)	262.86.790

Maxifix connecting bolt



- > Screws into M6 or M8 sleeve
- > Zinc-plated steel
- > Order qty: Multiples of 100 pcs



Screw in sleeves and dowels with M6/M8 internal thread are shown on pages **13.40-41**

Drilling distance B	35 mm	55 mm
M6 thread	262.86.901	262.86.902
M8 thread	262.86.911	262.86.912



- > Red jig for Maxifix housings are shown on **7.44-50**
- > Variantool-N drilling jig for drilling series-drilled holes for connecting bolts shown on page **7.45**