




IXCONNECT TAB SHELF CONNECTORS

- > Pulls shelf onto side panel
- > Shelves can be quickly removed and replaced at different levels
- > Support section, screw mounting
- > Boss insert without tensioning element
- > For board thicknesses 16 to 23 mm

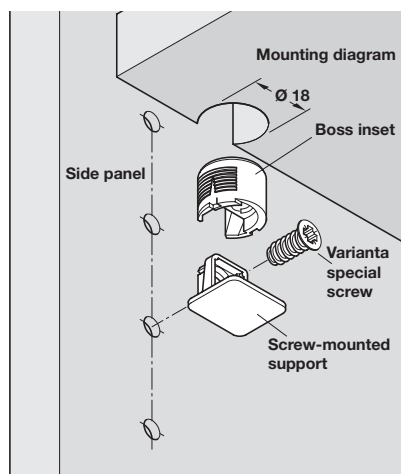

TAB shelf connectors consisting of: support and boss insert without tensioning element

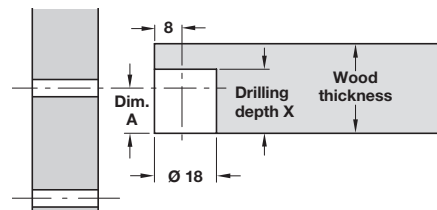


Drilling depth X = depends on type of housing and wood thickness (see order columns for details)

Dimension A = 1/2 wood thickness (see ordering table)

TAB shelf connector, screw fixing



- > Screw mounted into Ø 3 or 5 mm holes
- > For wood thicknesses from 16-23 mm
- > Zinc alloy support, plastic boss insert
- > Order qty: Multiples of 100 pcs



Varianta screws shown on pages **13.22-23**

For wood thicknesses from	Dim. A	Drilling depth X	Nickel-plated
16 mm	8.0 mm	13.0 mm	263.73.535



- > TAB 18 connectors shown on page **7.43**
- > Unitool drilling jig for TAB and TAB 18 connectors can be found on page **7.52-53**
- > Variantool-N drilling jig for drilling series-drilled holes for connecting bolts shown on page **7.45**