



IXCONNECT VARIANTA HC SPECIAL SCREW

- > Häfele developed the Varianta HC for lightweight panels with a top layer of 4 mm and above
- > The screw absorbs high pressure, pull-out force and shearing force, and leads the force off into the top layer
- > The special thread design of the Varianta HC cuts into the top layer over a wide area, ensuring that the screw is securely anchored in the top layer
- > The Varianta HC can be used independently of the thickness of the lightweight panel, and is used like a conventional chipboard screw
- > Application:
 - > Connectors, shelf supports, rear panel connectors, wardrobe rails/rail end supports and runners
- > Installation:
 - > Drill 3 mm or 5 mm hole into top layer in required position. Screw in the Varianta special screw for lightweight panels
 - > The screw can be subjected to maximum load after installation

Pull out strength




Lightweight panel with 4 mm thin chipboard top layer

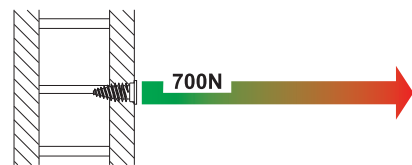


Lightweight panel with 8 mm thin chipboard top layer



Chipboard 16 mm

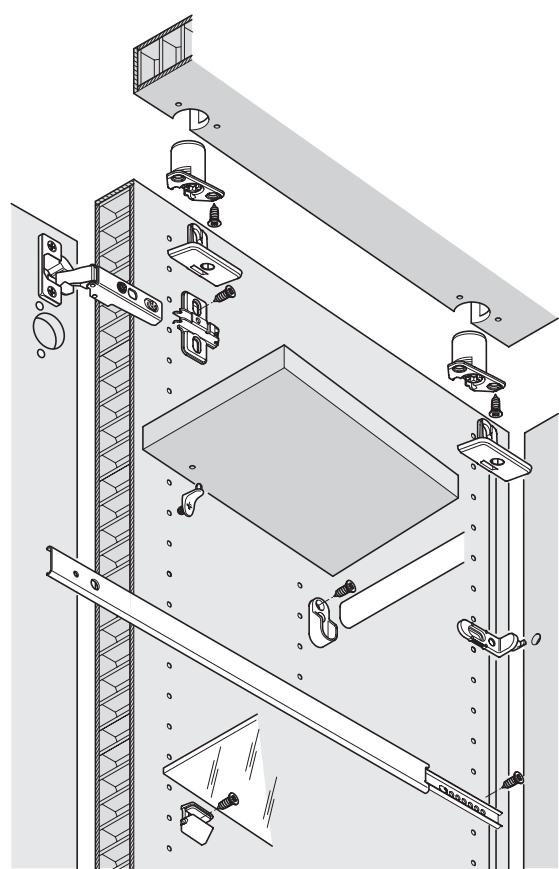

Varianta HC special screw, cylindrical head



- > Galvanized steel
- > Order qty: Multiples of 100 pcs



For drill hole Ø mm	Ø 3 mm	Ø 5 mm
Cat. No.	013.30.900	013.30.910