


LAMELLO CLAMEX FURNITURE CONNECTOR



Clemex P-14 Flexus


Flexible positioning pins

- > Aligns the workpiece and holds it in position during installation
- > Allows flexible assembly sequence
- > Allows tilting the workpiece in both directions

Lamello Clamex P-14 Flexus connector



- > Area of application: For corner, centre panel and surface connections, and mitre joint connections from 22.5°–180°, for solid wood and board materials
- > Material: Plastic, bolt: Zinc alloy
- > Drive: SW 4 hexagon socket
- > Adjustment facility: Lengthways ±1.0 mm
- > Order qty: See table below

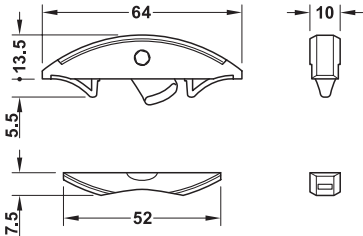

One-sided installation from wood thickness 12 mm

Model	For wood thickness	Cat. No.	Order qty
Clamex P-14 Flexus	From 16 mm	267.91.302	80
Clamex P-14 Flexus	From 16 mm	267.91.303	300

Installation

