






The locks can be operated by turning the protective cap with a screwdriver or coin, before the cylinder cores are installed

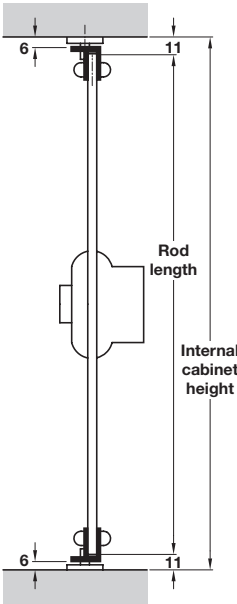

Symo 3000 Standard-Nova lock case



- > For on-site installation of cylinder cores
- > Backset D: 40 mm
- > Screw fixing
- > For Ø 6 mm or Ø 8 mm profile rod
- > Unhanded
- > Nickel-plated zinc alloy
- > Order qty: 1 pc

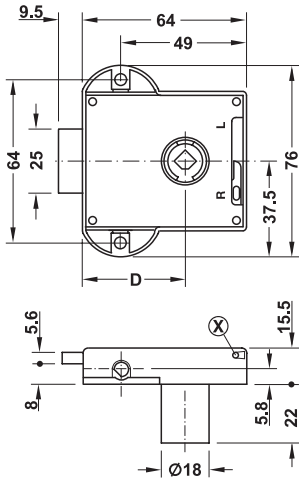

Order cylinder rosette separately, shown on page **8.114**

For profile rod	Cat. No.
Ø 6 mm	224.65.610
Ø 8 mm	224.65.600



- > Espagnolette lock accessories for Ø 6 mm profile rod suitable for Symo are shown on pages **8.101-104**
- > Lock handles for Symo 3000 lock cases are shown on page **8.30-31**
- > Cylinder cores for Symo 3000 lock cases are shown on pages **8.34-36**