



SYMO 3000 GLASS DOOR LOCK CASES



The locks can be operated by turning the protective cap with a screwdriver or coin, before the cylinder cores are installed




Symo 3000 glass door lock for hinged doors, for screw fixing




- > For on-site installation of cylinder cores
- > For glass door thickness 4-6 mm
- > For screw fixing with rear plate
- > Zinc alloy
- > Mounting: Key turn to the left
- > Supplied with:
 - 1x Glass door lock for hinged doors
 - 3x Rubber disks
 - 2x Threaded screws
- > Order qty: 1 pc

Finish	Cat. No.
Polished nickel plated	233.43.700
Matt nickel plated	233.43.600

Symo 3000 glass door cylinder lock with rack

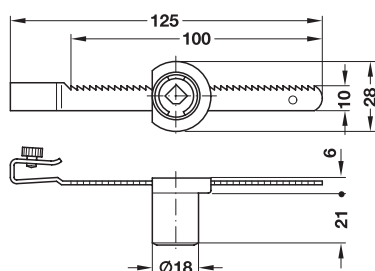

Installation

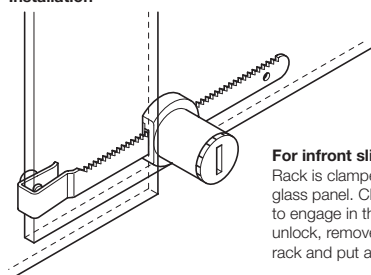

For infront sliding doors:

Rack is clamped onto the rear glass panel. Clip on lock and allow to engage in the rack. In order to unlock, remove the lock from the rack and put aside

- > For glass panels from 4-7 mm
- > For on-site installation of cylinder cores
- > Zinc alloy housing
- > Stainless steel rack
- > Order qty: 1 pc

Housing finish	Cat. No.
Matt nickel-plated	233.44.600



- > Lock handles for Symo 3000 lock cases are shown on page **8.30-31**
- > Cylinder cores for Symo 3000 lock cases are shown on pages **8.34-36**