



SYMO 3000 GLASS DOOR LEVER LOCK CASES




- > 90° Closure direction:
- > Closure directions can be altered by re-positioning the cam, but always moving in the same direction*:
- > Closure direction A can be altered to D, F or G
- > Closure direction B can be altered to C, E or H

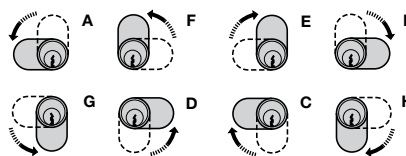


Overlay doors



Inset doors

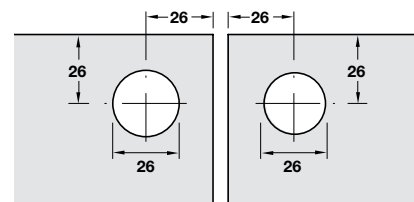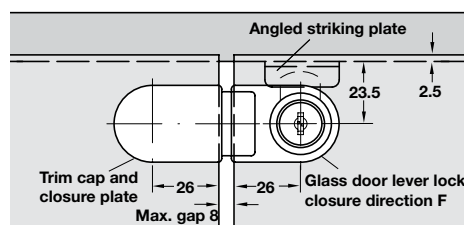

Symo 3000 glass door lever lock case



- > For on-site installation of cylinder cores
- > For glass thickness 4-10 mm
- > Closure travel: 90° locking cam (reversible), 180° key
- > Zinc alloy
- > Supplied with: 1x locking cam, 1x nut and 1x angled steel striking plate, 1x clamping plate and 1x clamping plastic rosette
- > Order qty: 1 pc

Closure direction	A (D, F, G)	B (C, E, H)
Polished nickel-plated	233.42.600	233.42.610
Matt nickel-plated	233.42.700	233.42.710


Trim cap and closure plate



**Threaded screws:

M6 x 10 mm
for glass panels
up to 8 mm


M6 x 12 mm
for glass panels
up to 10 mm

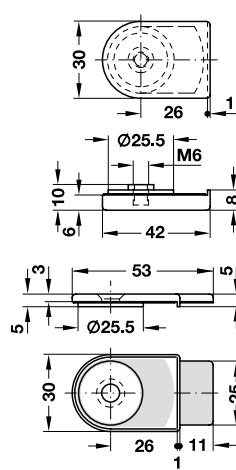

- > For use on double doors, opposite the lock
- > For glass panels from 4-10 mm**
- > Use on left or right hand door
- > Zinc alloy
- > Supplied with: 2x M6 threaded screws, 2x plastic clamping plates and 1x clamping element
- > Order qty: 1 pc

Finish	Cat. No.
Polished nickel-plated	233.40.712
Matt nickel-plated	233.40.610

Symo 3000 angled striking plate



- > For screw fixing
- > Steel
- > Order qty: 1 pc

Finish	Cat. No.
Black	233.42.390
Matt nickel-plated	233.42.790



- > Lock handles for Symo 3000 lock cases are shown on page **8.30-31**
- > Symo 3000 glass door lever lock cases are only suitable for use with plate lever cylinder cores shown on pages **8.34-36**

PAGE AMENDED
24.04.25/1