


Push to open soft close mechanism, for use with concealed hinges



- > Width x Depth x Height: 202 x 18 x 72 mm
- > For opening angle $\leq 110^\circ$
- > Door width W: ≤ 600 mm
- > One touch push opening soft close mechanical system is an innovative product for soft close and push to open applications
- > Integrating push opening and soft closing functions that can free your hands and allow you to operate the door in an environment vulnerable to bacteria
- > Hands free, hygienic and convenient to operate
- > Product quality level tested to 50,000 cycles
- > Fully mechanical design, no need to connect with electric power
- > Smart design and occupying little space
- > Friendly-to-use as closing and opening only by gentle pressing
- > Revolutionary operation compare to regular push latches
- > Black plastic
- > Order qty: 1 pc

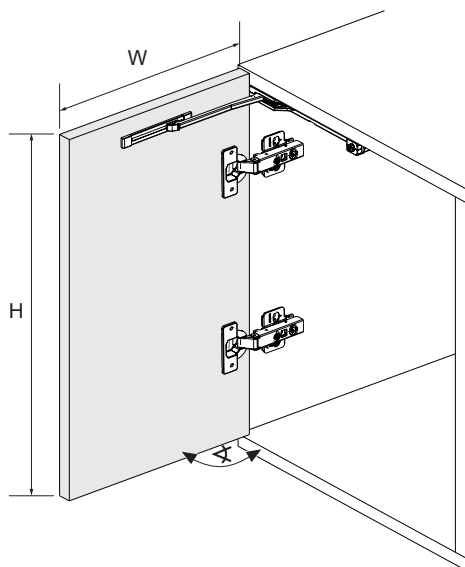

- > When the fitting is not completely installed please do not press the activator as it will
- > In order to prevent accidental injury caused by suddenly pop-up of the push rod during installation, please cover the push rod with your hand before pressing the activator screw (refer to warning label on product)



Push to open soft close mechanism should be used in combination with unsprung hinges, order separately, shown on page 9.77



For door weight	Max. door height H	Cat. No.
Max. 7.5 kg	≤ 700 mm	315.11.400
Max. 20 kg	≤ 2700 mm	315.11.401
Max. 25 kg	≤ 2700 mm	315.11.411