



Mitred flap hinge, for 45° mitred applications



- > Only for use in combination with flap or lid stay
- > Opening angle max. 90°
- > For flap and bottom panel thickness 16 - 22 mm with 45° mitre angle
- > Ø 35 mm cup
- > Screw fixing
- > Adjustable up to 3 mm in 3 directions
- > Nickel-plated zinc alloy cup and nickel-plated steel arm
- > Order fixing screws separately
- > Order qty: 1 pc

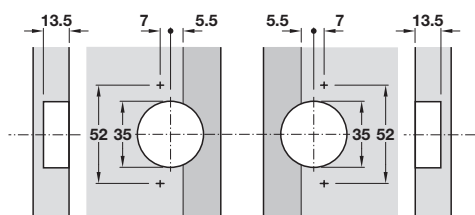


Opening angle

Cat. No.


90°

325.02.702

Mitred hinge, for 22.5° mitred applications

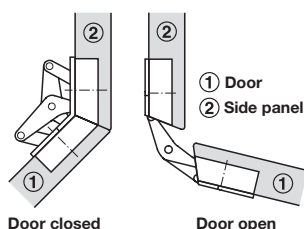

- > Specially designed to enable door and carcass edges to meet at mitred angles
- > Opening angle 120°
- > For door and side panel thickness 16 - 22 mm with 22.5° mitre angle
- > Ø 35 mm cup
- > Screw fixing
- > Adjustable up to 3 mm in 3 directions
- > Nickel-plated zinc alloy cup and nickel-plated steel arm
- > Order fixing screws separately
- > Order qty: 1 pc

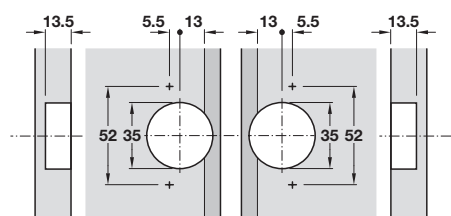


Opening angle

Cat. No.


120°

325.00.726

Mitred hinge, for 45° mitred applications

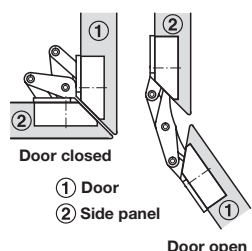

- > Specially designed to enable door and carcass edges to meet at mitred angles
- > Opening angle 135°
- > For door and side panel thickness 16 - 22 mm with 45° mitre
- > Ø 35 mm cup
- > Screw fixing
- > Adjustable up to 3 mm in 3 directions
- > Nickel-plated zinc alloy cup and nickel-plated steel arm
- > Order fixing screws separately
- > Order qty: 1 pc

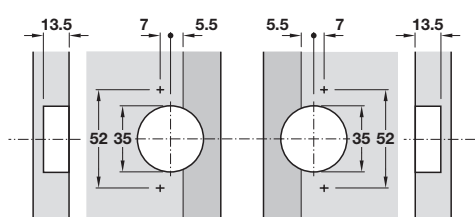

Opening angle

Cat. No.

135°

325.00.708