


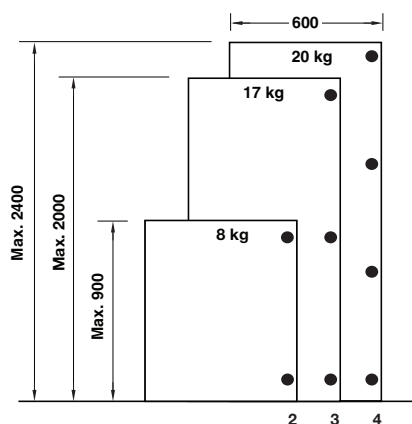



How many hinges per door?

The hinge requirement is determined by the weight and the shape of the door.

Manufacturer's advice is shown opposite for the number of hinges to be used on doors created from 19 mm thick chipboard.

Doors must not be wider than they are high.

Grass Aximat hinges with exposed axle, half overlay mounting, vertical adjustment





- > For hinging one half overlay door, side panel mounted
- > Opening angle 230°
- > For door thickness 16-20 mm
- > For minimum side panel thickness 19 mm
- > 5.5 mm overlay
- > Order fixing screws separately
- > Order qty: 1 pc



Finish	Cat. No.
Nickel-plated	344.21.006

Grass Aximat hinges with exposed axle, twin mounting, lateral adjustment

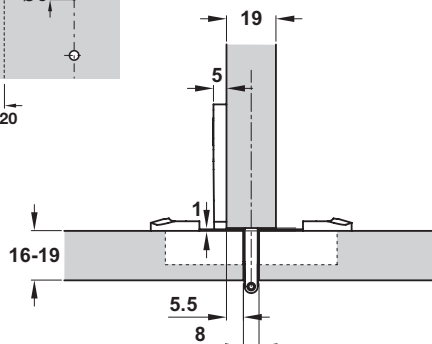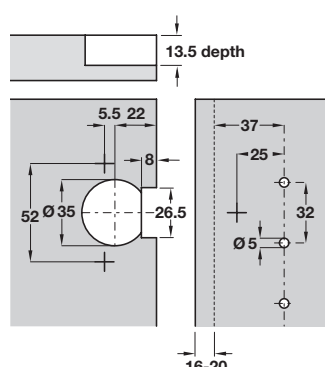

- > Suitable for twin mounting. Flush fitting doors
- > Opening angle 180°
- > For door thickness up to 20.5 mm
- > For minimum side panel thickness 19 mm
- > 5.5 mm overlay
- > Order fixing screws separately
- > Order qty: 1 pc



Finish	Cat. No.
Nickel-plated	344.21.007