


Stay Flap Fitting Häfele Free Slim flap 1.12 for standard applications with handle

For one-piece flaps made from wood or with aluminium frame



Planning and space requirement

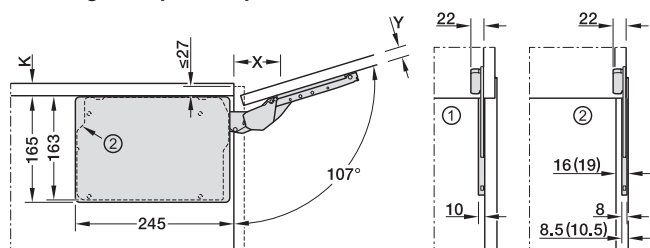

①For screw fixing to inner cabinet side panel

②For groove mounting into the external cabinet side panel

Dimensions in brackets apply to material thickness 19 mm

Front panel thickness Y mm	16	18	19	22	24	26	28
Distance X mm (with cabinet top panel thickness K=16 mm)	61	54	51	41	34	27	20

Sample measurements table for max. flap weight including handle

Free Slim flap 1.12, LF≈480–4800			
Cabinet height mm	Flap weight kg	Cabinet height mm	Flap weight kg
225	2,1–21,3	450	1,1–10,7
250	1,9–19,2	475	1,0–10,1
275	1,7–17,5	500	1,0–9,6
300	1,6–16,0	525	0,9–9,1
325	1,5–14,8	550	0,9–8,7
350	1,4–13,7	575	0,8–8,3
375	1,3–12,8	600	0,8–8,0
400	1,2–12,0	625	0,8–7,7
425	1,1–11,3	650	0,7–7,4

Efficiency factor EF = Cabinet height (mm) x Front panel weight including double handle weight (kg)

Note

The flap weight and handle specified for the respective cabinet height refers to the use of a set (2 pieces).

The flap weight incl. handle can be increased by 50 % when a third fitting is used.

The flap weight incl. handle can be doubled by using two sets (4 pieces).

- > Area of application: For all standard stay flap applications with handle up to cabinet height 650 mm, for one-piece flaps made from wood or with aluminium frame
- > Material: Steel, plastic
- > Colour/finish: Housing: zinc plated, Lever arm: Nickel plated
- > Opening angle: 90° or 107°
- > For cabinet width: ≤1800 mm
- > For cabinet height: 225–650 mm
- > For lid weight: ≤21.3 kg, note sample measurements table and cabinet height
- > Installation depth: 245 mm
- > Adjustment facility: Height, side, tilting angle, holding power and opening angle
- > Installation: For screw fixing to the inside of the cabinet or recess mounting into the external cabinet side panel, front fixing brackets for screw fixing or with pre-mounted spreading dowels, ø 10 mm (quick fixing system SM)

Supplied with

Box 1:

1 Häfele Free Slim flap 1.12 set (2 pieces, symmetrical)

Box 2:

2 Front fixing brackets incl. cover caps and fixing screws

Box 3a:

Installation for screw fixing to the inside of the cabinet:

2 Cover caps incl. fixing material for fitting

1 Set of installation instructions for screw fixing

Box 3b:

Installation for recess mounting into the external cabinet side panel:

4 Threaded screws with cover caps

2 Edge panels for milling pocket

2 Panel extensions for cabinet material 18–19 mm

2 Cover caps through hole load bearing capacity adjustment

1 Cabinet connecting screw

1 Set of installation instructions for recess mounting

Order reference

The following applies to flaps with aluminium frame width of 19–21 mm: For screw fixing, the adapter set 372.92.693 (nickel plated) or 372.92.694 (black) is required, please order separately. No adapter is required for recess mounting.



Adapter set for flaps with aluminium frame, shown on page 9.197E



Installation	White	Light grey	Anthracite	Black
For screw fixing to the inside of the cabinet				
With front fixing brackets for screw fixing	372.92.700	372.92.500	372.92.360	372.92.300
With front fixing brackets with pre-mounted spreading dowels, ø 10 mm	372.92.701	372.92.501	372.92.361	372.92.301
For recess mounting in external cabinet side panel				
With front fixing brackets for screw fixing	372.92.702	372.92.502	372.92.362	372.92.302
With front fixing brackets with pre-mounted spreading dowels, ø 10 mm	372.92.703	372.92.503	372.92.363	372.92.303

Order qty: 1 set