


Stay Flap Fitting Häfele Free Slim flap 1.10 push for standard applications without handles

For one-piece flaps made from wood or with aluminium frame



Planning and space requirement

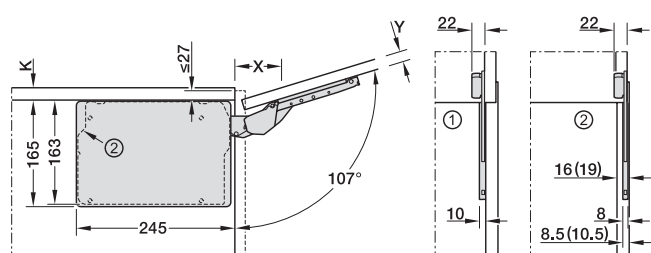

- ① For screw fixing to inner cabinet side panel
 ② For groove mounting into the external cabinet side panel
 Dimensions in brackets apply to material thickness 19 mm

Front panel thickness Y mm	16	18	19	22	24	26	28
Distance X mm (with cabinet top panel thickness K=16 mm)	61	54	51	41	34	27	20

Sample measurements table for flap weight

Free Slim flap 1.10 push, LF≈480–4080			
Cabinet height mm	Flap weight kg	Cabinet height mm	Flap weight kg
225	2,1–18,1	450	1,1–9,1
250	1,9–16,3	475	1,0–8,6
275	1,7–14,8	500	1,0–8,2
300	1,6–13,6	525	0,9–7,8
325	1,5–12,6	550	0,9–7,4
350	1,4–11,7	575	0,8–7,1
375	1,3–10,9	600	0,8–6,8
400	1,2–10,2	625	0,8–6,5
425	1,1–9,6	650	0,7–6,3

Efficiency factor EF = Cabinet height (mm) x Front panel weight (kg)

Note

The flap weight specified for the respective cabinet height refers to the use of a set (2 pieces).
 The flap weight can be increased by 50 % when a third fitting is used.
 The flap weight can be doubled by using two sets (4 pieces).

- > Area of application: For all standard stay flap applications without handle up to cabinet height 650 mm (Push-to-Open), for one-piece flaps made from wood or with aluminium frame
- > Material: Steel, plastic
- > Colour/finish: Housing: zinc plated, Lever arm: Nickel plated
- > Opening angle: 90° or 107°
- > For cabinet width: ≤1800 mm
- > For cabinet height: 225–650 mm
- > For lid weight: ≤18.1 kg, note sample measurements table and cabinet height
- > Installation depth: 245 mm
- > Adjustment facility: Height, side, tilting angle, holding power, opening angle and release distance on push catch
- > Installation: For screw fixing to the inside of the cabinet or recess mounting into the external cabinet side panel, front fixing brackets for screw fixing or with pre-mounted spreading dowels, ø 10 mm (quick fixing system SM)

Supplied with

Box 1:

1 Häfele Free Slim flap 1.10 push set (2 pieces, symmetrical)

Box 2:

2 Front fixing brackets incl. cover caps and fixing screws

Box 3a:

Installation for screw fixing to the inside of the cabinet:

2 Cover caps incl. fixing material for fitting

1 Set of installation instructions for screw fixing

Box 3b:

Installation for recess mounting into the external cabinet side panel:

4 Threaded screws with cover caps

2 Edge panels for milling pocket

2 Panel extensions for cabinet material 18–19 mm

2 Cover caps through hole load bearing capacity adjustment

1 Cabinet connecting screw

1 Set of installation instructions for recess mounting

Order reference

Push catch (type 3 – strong) and screw-on housing not supplied, please order separately.

The following applies to flaps with aluminium frame width of 19–21 mm: For screw fixing, the adapter set 372.92.693 (nickel plated) or 372.92.694 (black) is required, please order separately. No adapter is required for recess mounting.



Push catch and screw-on housing, and adapter set for flaps with aluminium frame, shown on page 9.197E



Installation	White	Light grey	Anthracite	Black
For screw fixing to the inside of the cabinet				
With front fixing brackets for screw fixing	372.92.704	372.92.504	372.92.364	372.92.304
With front fixing brackets with pre-mounted spreading dowels, ø 10 mm	372.92.705	372.92.505	372.92.365	372.92.305
For recess mounting in external cabinet side panel				
With front fixing brackets for screw fixing	372.92.706	372.92.506	372.92.366	372.92.306
With front fixing brackets with pre-mounted spreading dowels, ø 10 mm	372.92.707	372.92.507	372.92.367	372.92.307

Order qty: 1 set