


Free Space 1.11 complete set



- > For one-piece flaps made of wood or with aluminium frame, from frame width 45 mm
- > Area of application: For standard stay flap applications with front height up to 650 mm
- > Opening angle: 90° or 107°
- > Installation: Fitting for screw fixing with pre-mounted Euro screw, front panel fixing without tools, for sliding onto pre-mounted fixing screws
- > Adjustment facility: Height ± 2 mm, side ± 1.5 mm, tilting angle ± 2 mm, holding power
- > Set includes:
 - 1 stay flap fitting set (1 piece each left/right)
 - 4 fixing screws for front panel
 - 1 set of installation instructions with paper drilling template for side panel
- > Material: Plastic housing, steel front fixing bracket and support lever
- > Finish/colour: Nickel plated front fixing bracket and support lever. White, light grey or anthracite housing
- > Order qty: 1 set



Planning

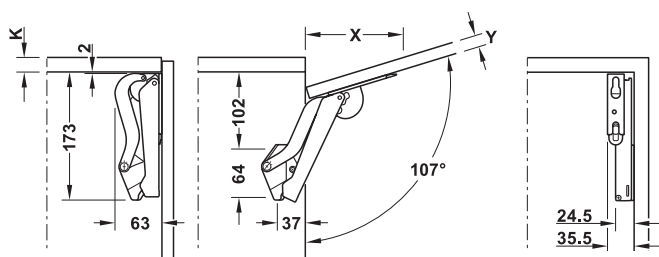

Front panel thickness Y mm	16	18	19	22	24	26	28
Distance X mm (with cabinet top panel thickness K=16 mm)	117	110	107	96	90	83	76



Please order suitable screw set 372.27.600 for aluminium frame front panels from frame width 45 mm. Shown on page 9.224



- > The choice of the stay flap fitting for front panels with handle depends on the cabinet height and flap weight including handle
- > Model selection see sample measurements table. We recommend to use the stronger fitting model when in doubt

Sample measurements table for selecting the right model based on cabinet height and flap weight

Model Häfele Free Space 1.11	B	C	D	E	F
Cabinet height mm	Flap weight kg				
225	2.3-4.3	3.8-7.1	6.4-9.3	9.2-13.4	13.4-19.1
250	1.9-3.9	3.4-6.4	5.8-9.1	8.3-12.6	12.1-17.2
275	1.9-3.5	3.1-5.8	5.3-8.2	7.5-12.0	11.0-15.6
300	1.7-3.2	2.8-5.3	4.8-7.5	6.9-11.0	10.1-14.3
325	1.6-3.0	2.6-4.9	4.4-7.0	6.4-10.2	9.3-13.2
350	1.5-2.8	2.4-4.6	4.1-6.5	5.9-9.5	8.6-12.3
375	1.3-2.6	2.2-4.3	3.8-6.0	5.5-8.8	8.1-11.4
400	1.2-2.4	2.1-4.0	3.6-5.6	5.2-8.3	7.6-10.7
425	1.1-2.3	2.0-3.8	3.4-5.3	4.9-7.8	7.1-10.1
450	1.0-2.1	1.9-3.5	3.2-5.0	4.6-7.3	6.7-9.5
475	1.0-2.0	1.8-3.4	3.0-4.7	4.3-7.0	6.4-9.0
500	0.9-1.9	1.7-3.2	2.9-4.5	4.1-6.6	6.0-8.6
525	0.9-1.8	1.6-3.0	2.7-4.3	3.9-6.3	5.7-8.2
550	0.8-1.7	1.5-2.9	2.6-4.1	3.7-6.0	5.5-7.8
575	0.8-1.7	1.4-2.8	2.5-3.9	3.6-5.7	5.2-7.4
600	0.8-1.6	1.4-2.7	2.4-3.7	3.4-5.5	5.0-7.1
625	0.7-1.5	1.3-2.5	2.3-3.6	3.3-5.3	4.8-6.8
650	0.7-1.5	1.3-2.4	2.2-3.5	3.2-5.1	4.6-6.6



Model	White	Light grey	Anthracite
B	372.27.700	372.27.500	372.27.350
C	372.27.701	372.27.501	372.27.351
D	372.27.702	372.27.502	372.27.352
E	372.27.703	372.27.503	372.27.353
F	372.27.704	372.27.504	372.27.354