


Free Space 1.8 push complete set - for applications without handles



- > For one-piece flaps without handles, made of wood or with aluminium frame, from frame width 45 mm
- > Area of application: For all stay flap applications without handle with front height up to 650 mm (push-to-open)
- > Opening angle: 90° or 107°
- > Installation: Fitting for screw fixing with pre-mounted Euro screw, front panel fixing without tools, for sliding onto pre-mounted fixing screws
- > Adjustment facility: Height ± 2 mm, side ± 1.5 mm, tilting angle ± 2 mm, holding power, release distance on push catch
- > Set includes:
 - 1 stay flap fitting set (1 piece each left/right)
 - 4 fixing screws for front panel
 - 1 Free push catch
 - 1 set of installation instructions with paper drilling template for side panel
- > Material: Plastic housing, steel front fixing bracket and support lever
- > Finish/colour: Nickel plated front fixing bracket and support lever. White, light grey or anthracite housing
- > Order qty: 1 set

Push catch installation

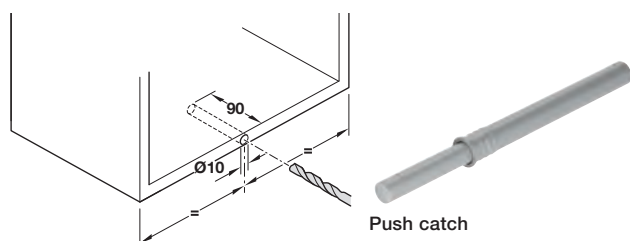


Sample measurements table for selecting the right model based on cabinet height and flap weight

Model Häfele Free Space 1.8 push	B pto	C pto	D pto	E pto
Cabinet height mm	Flap weight kg			
225	2.3-4.3	3.8-7.1	6.4-9.3	9.2-13.4
250	1.9-3.9	3.4-6.4	5.8-9.1	8.3-12.6
275	1.9-3.5	3.1-5.8	5.3-8.2	7.5-12.0
300	1.7-3.2	2.8-5.3	4.8-7.5	6.9-11.0
325	1.6-3.0	2.6-4.9	4.4-7.0	6.4-10.2
350	1.5-2.8	2.4-4.6	4.1-6.5	5.9-9.5
375	1.3-2.6	2.2-4.3	3.8-6.0	5.5-8.8
400	1.2-2.4	2.1-4.0	3.6-5.6	5.2-8.3
425	1.1-2.3	2.0-3.8	3.4-5.3	4.9-7.8
450	1.0-2.1	1.9-3.5	3.2-5.0	4.6-7.3
475	1.0-2.0	1.8-3.4	3.0-4.7	4.3-7.0
500	0.9-1.9	1.7-3.2	2.9-4.5	4.1-6.6
525	0.9-1.8	1.6-3.0	2.7-4.3	3.9-6.3
550	0.8-1.7	1.5-2.9	2.6-4.1	3.7-6.0
575	0.8-1.7	1.4-2.8	2.5-3.9	3.6-5.7
600	0.8-1.6	1.4-2.7	2.4-3.7	3.4-5.5
625	0.7-1.5	1.3-2.5	2.3-3.6	3.3-5.3
650	0.7-1.5	1.3-2.4	2.2-3.5	3.2-5.1



Loox drilling jig 001.25.080 can be used for preparing the Ø10 mm drill hole for insertion of the push catch; visit hafele.co.uk for details

Planning

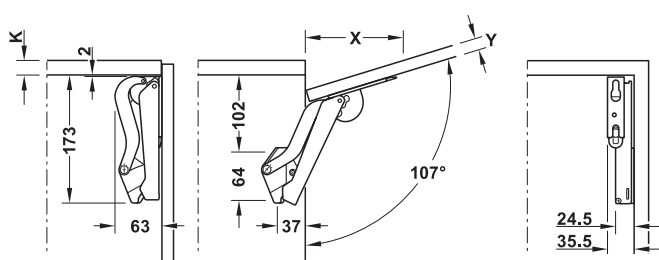

Front panel thickness Y mm	16	18	19	22	24	26	28
Distance X mm (with cabinet top panel thickness K=16 mm)	117	110	107	96	90	83	76



Please order suitable screw set 372.27.600 for aluminium frame front panels from frame width 45 mm. Shown on page 9.224



- > The choice of the stay flap fitting for front panels with handle depends on the cabinet height and flap weight including handle
- > Model selection see sample measurements table. We recommend to use the stronger fitting model when in doubt



Model	White	Light grey	Anthracite
B pto	372.27.705	372.27.505	372.27.355
C pto	372.27.706	372.27.506	372.27.356
D pto	372.27.707	372.27.507	372.27.357
E pto	372.27.708	372.27.508	372.27.358